


SPECIAL SERIES CHAINS


HEAVY DRIVE CHAIN

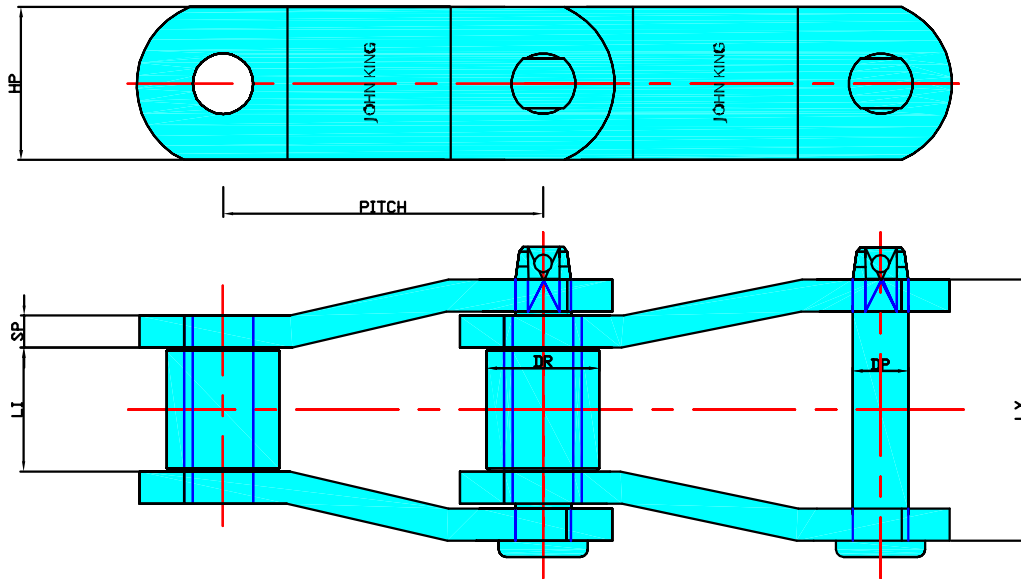

All measurements in mm

CHAIN No.	PITCH P	BREAKING LOAD		INSIDE WIDTH LI	ROLLER DR	PIN DP	PLATE HEIGHT HP	THICKNESS SP	MAXIMUM OVERALL WIDTH LX
		Lbs	Kg/F						
JK 508	50.8	65,000	29,480	31.75	31.75	14.27	40.00	8.00	79
JK 882	66.27	28,000	12,700	28.57	28.57	11.13	30.00	6.00	66
JK 3011	77.90	110,000	49,900	38.9	38.9	19.05	55.00	10.00	99
JK 1031	78.10	48,000	21,770	35.6	35.6	15.88	40.00	8.00	88
JK 3075	78.10	75,000	34,000	37.34	37.34	16.50	40.00	8.00	96
JK 3500	88.90	150,000	68,000	36.6	36.6	22.23	60.00	12.70	114
JK 4063	103.20	150,000	68,000	49.28	49.28	22.23	60.00	12.70	128
JK 4073	103.45	170,000	77,110	48.50	48.50	25.40	60.00	12.70	130
JK 4500	114.30	208,000	94,348	50.80	50.80	27.90	75.00	14.00	135
JK 5031	127.00	260,000	117,940	69.85	69.85	31.75	90.00	15.00	158
JK 1605	127.00	330,000	149,700	63.50	63.50	34.93	90.00	20.00	170
JK 6042	152.40	420,000	190,510	74.60	76.20	38.10	100.00	20.00	185

Direction of Drive Chain Travel as a Function of Wear

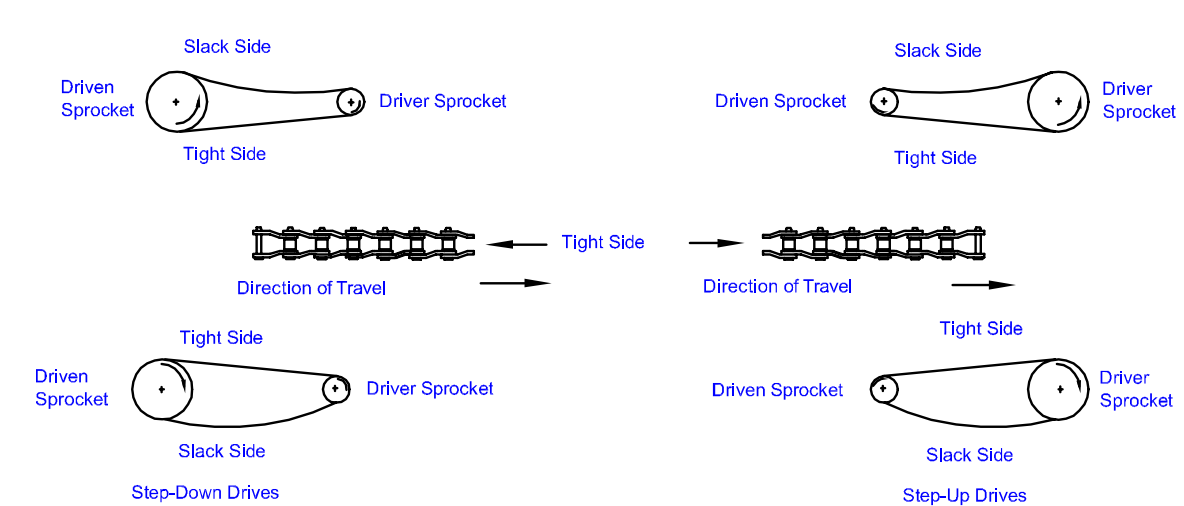

(UK) John King Chains Limited.
 New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK
 Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899
 E-mail: admin@johnking-chain.com
 technical@johnking-chain.com
 sales@johnking-chain.com

John King (USA) Inc.
 200 Catherine Street, Unit 7B, E. Peoria IL61611 USA
 Telephone: 309-698-9250 Facsimile: 309-698-9259
 E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com