



JOHN KING

Conveyor Chains & Sprockets Worldwide

Sugar Industry Chains (cane and beet).



Material Processing Solutions Since 1926.



Get in Touch With Us

John King Chains Limited
Lancaster Business Park, Sherburn-in-Elmet, LS25 6NS, UK
ENGLAND

or Call Us by Phone

+44 1977 681 910

Rev1708.2022
This design is the exclusive property of JOHN KING CHAIN Ltd
and copyright protected under the Designs and Patents Act 1988

Mission Statement and Values.

Our mission is to produce high-performing products and solutions, in a safe, efficient and consistent manner that is aimed at surpassing the expectations of our global customers. We support our products by providing superior customer care.

Our care extends to the environment, employees, their families and the wider community. We endeavour to provide a safe, rewarding work environment that recognises individual achievement and fosters the skills of teamwork and communication.

The challenges of competing in a global market are changing all the time, so it is essential to our continued success that everyone who works at John King has the same positive attitude.

What will never change is the commitment to a high degree of professionalism conducted with a high level of courtesy.

There are six elements to the John King Group positive attitude:



The manufacturers 'Mentality'

A total commitment to 'Quality'



With a primary focus on 'Safety'

With a high level of 'Integrity'




With an objective to 'Innovate'


Always remembering to 'Enjoy' life in the Kingdom!



Typical Process Layout for Roll Mill-Type System.

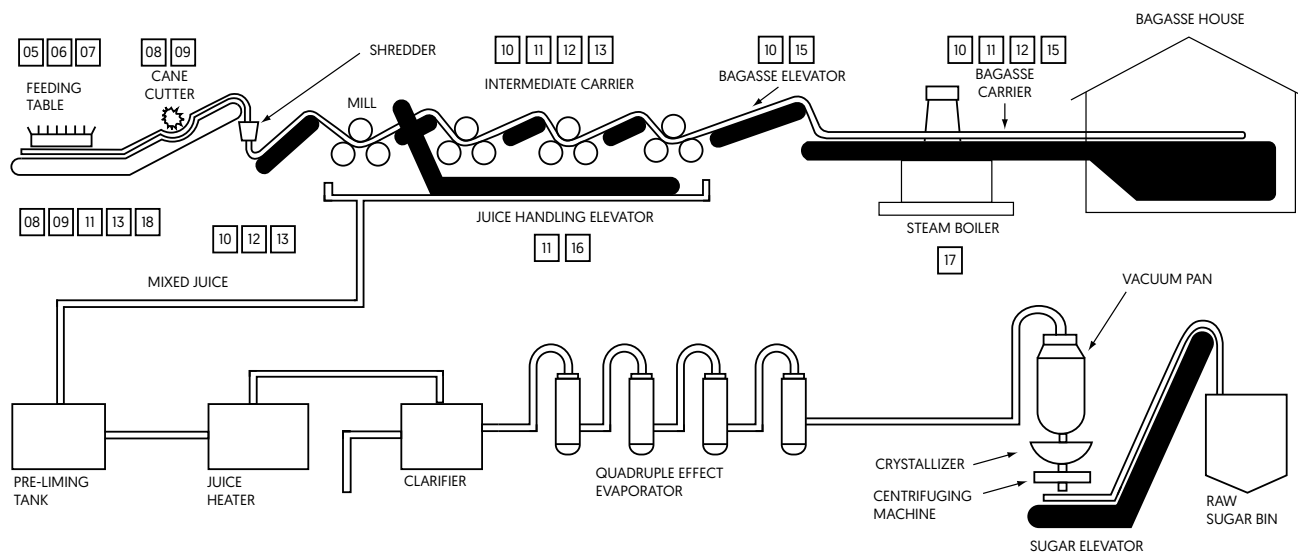

Typical Process Layout for a Diffuser System.

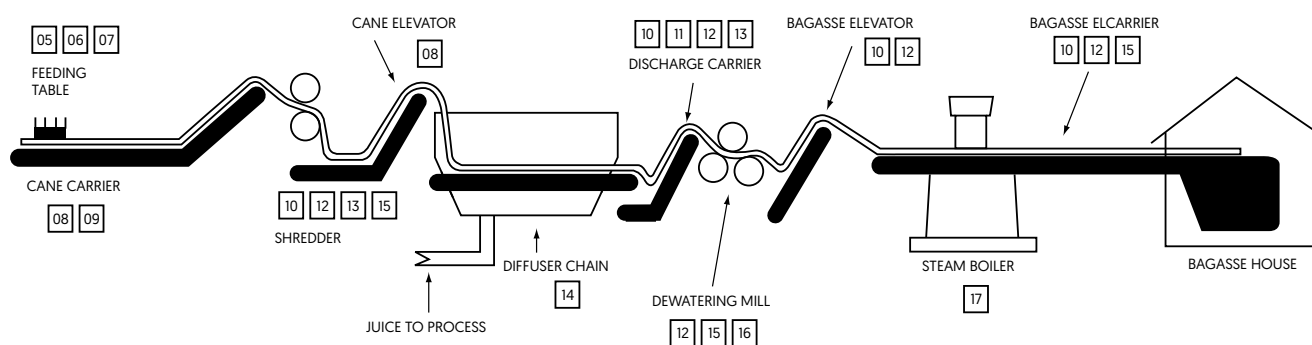

From Survey to Drawing to Production to Installation

Your integrated supply partner.

In the aggressive environment of sugar production there is an ongoing requirement for refurbishment and replacement of plant and equipment in all areas of the process. John King Group is a combined business uniquely equipped to serve the industry with a full spectrum of essential engineering services to ensure customers equipment is in the best condition in order to maintain essential processes.



Inspection, Survey and Consultation.

As part of the supply package qualified engineers will come to site and inspect items of plant and equipment to establish and report on the condition. Subsequent consultation generally includes means for improvement such as: materials employed, design, construction, implementation, additional operation and maintenance advice.



Industry Leading Steel Processors.

With decades of in-house experience in metal processing and fabrication, we use the latest technology and techniques to deliver quality, bespoke solutions for our clients. From laser cutting to punching, bending and welding our skilled team will deliver a high quality solution that is both on time and in budget.







Design and Drawing Service.

Design and technical drawing is part of our service. We create the technical drawing directly from our site survey or work with you to create a full design brief to meet your fabrication needs. We will support you in developing and improving the plant and equipment .



Fully Integrated Installation.

Our site service team comprising experienced mechanical fitters and fabricators will install all types of mechanical handling equipment, metal fabrications and equipment at your premises in the agreed timescale with a high degree of competence whilst operating under strict safety protocol.

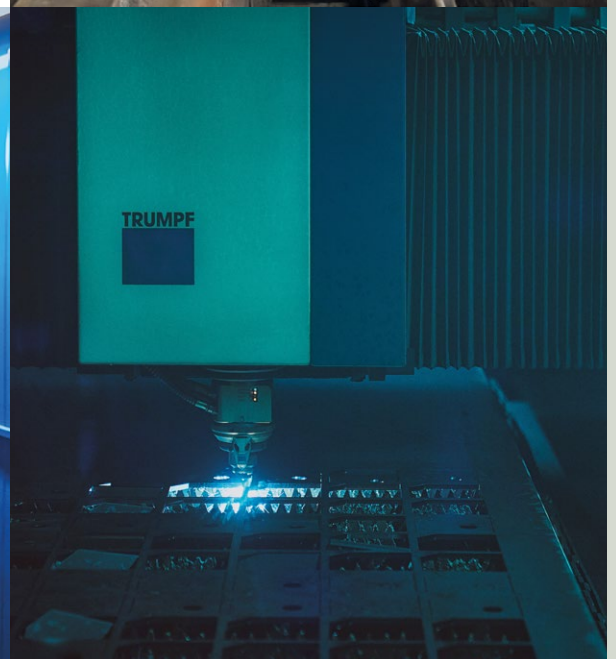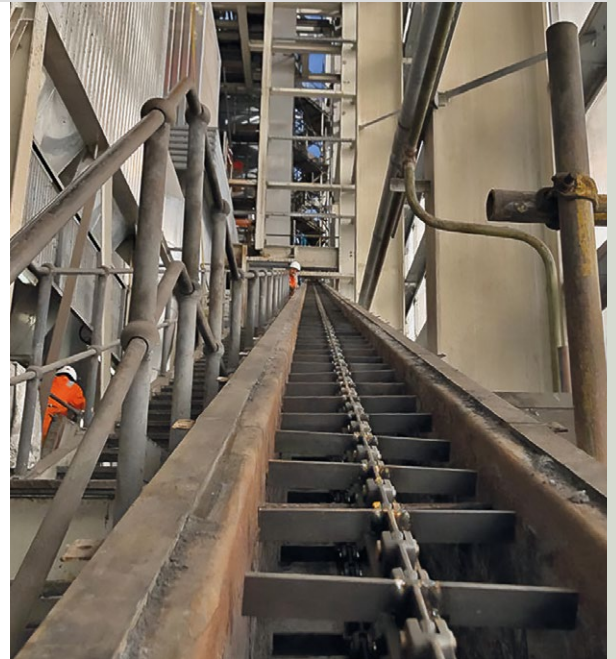



The Undisputed Kings of Laser Profiling and Fabrication.

FROM SURVEY TO DRAWING TO PRODUCTION – THE ONE STOP SHOP

John King Laser was established in 2007 primarily to service the mechanical handling division. It was well understood that the available capacity surpassed that of in-house requirements and the business model from the outset was to sell laser cut, formed and fabricated parts to a wide variety of customers producing a wide range of machinery and equipment.

More recently John King Laser has been able to support the groups site service division where bespoke fabrications have been required.

The laser division has remained autonomous from the start whilst critically benefitting as part of the Group structure in investing in new technology to give the division a distinct advantage in efficiency and quality of products produced. The recent installation of the newest and probably best laser capacity in the country is testament to this.

Manufacturing Capabilities.


The 2020s business is a lean enterprise working from a modern manufacturing facility employing best production techniques including fibre laser technology, plasma for thicker material sections, CNC machining and robotics. Group structure provides the internal resource to implement production management systems that ensures highest quality, consistent and competitive products produced in a safe environment. All manufacturing is conducted within the dictates of ISO 9001 to the latest 2015 standard to ensure quality objectives are monitored and maintained.

LASER CUTTING CAPABILITIES

- Mild and carbon steel up to 25 mm.
- Stainless steel up to 15 mm.
- Aluminium up to 12 mm.

FLAME CUTTING AND PLASMA CUTTING CAPABILITIES

- Machine bed size of 4 m x 2.5 m.
- Flame cutting up to 110 mm.
- Plasma cutting up to 30 mm.

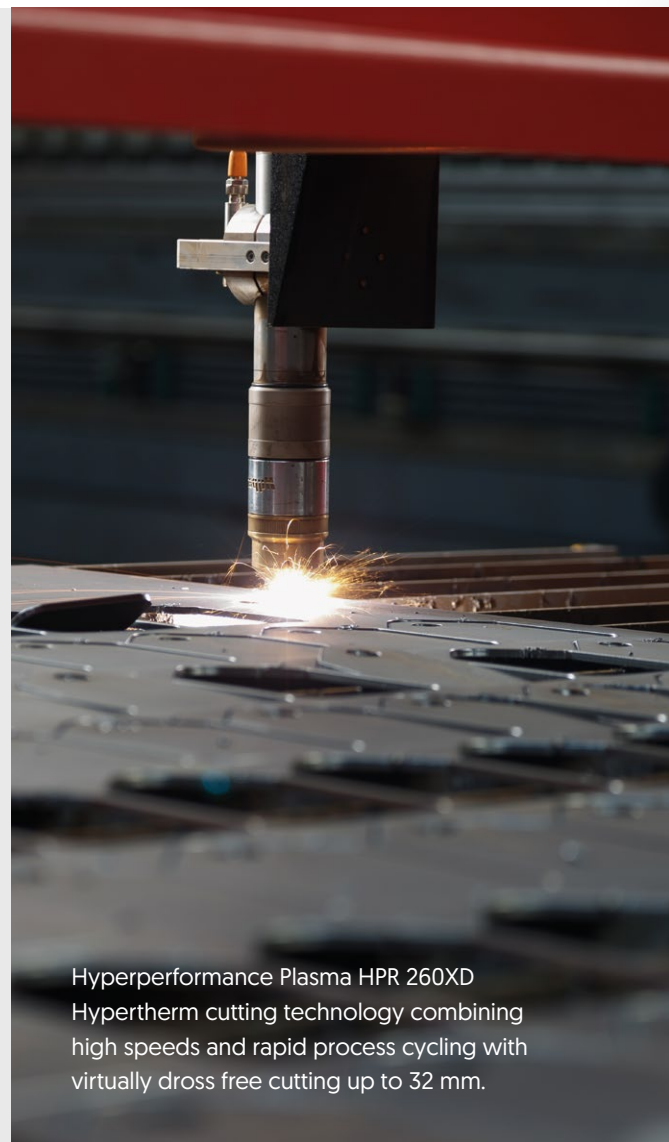

Hyperperformance Plasma HPR 260XD
Hypertherm cutting technology combining high speeds and rapid process cycling with virtually dross free cutting up to 32 mm.



Trulaser 3040 Fibre laser with increased 4000 x 2000 bed size including integrated lift master and plate storage tower for unrivalled efficiency in parts production.

Press Technology.

In support of our impressive range of flatbed processing capabilities we operate CNC Synchro press brake machines capable of pressing parts with capacities up to and including 220 tons and 4000 mm in length. With smaller machines with 2000 mm gap and 100 mm stroke for smaller parts in higher volume production.



Welding and Fabrication.


Our welding and fabrication capacity includes a high level of skill in both internal and external projects. This enables John King's laser and fabrication division to offer an all-encompassing manufacturing service. The site service division will thereafter take charge of the installation as required.

Ash hopper during fabrication as a direct replacement to an existing unit.

Replacement conveyor sections reproduced on a like for like basis.

A new precipitator dust conveyor during manufacture and prior to entering the paint shop.

Chute sections to make up a full arrangement ready for site service installation.

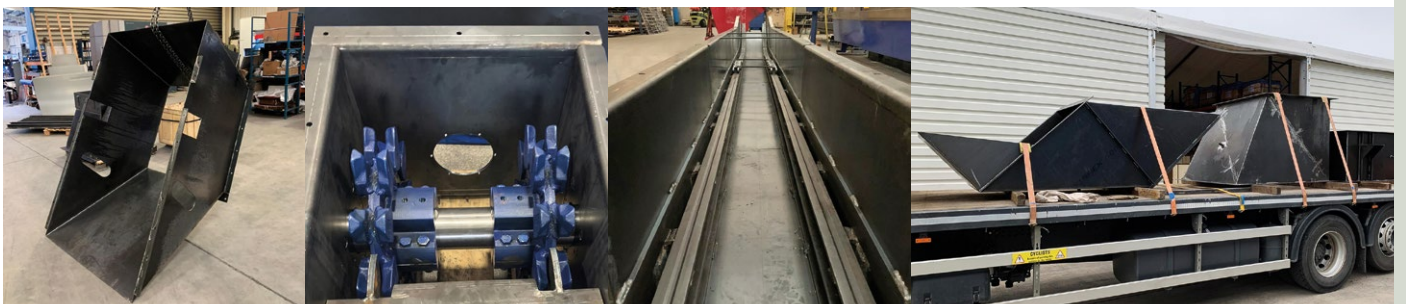

Site Services The Complete Supply Package.




Bulk handling experts you can rely on.

The John King Site Service Division employ a highly skilled team of engineers solely dedicated to the **service and maintenance of bulk material handling equipment** which includes – installing, servicing and maintaining all aspects of mechanical handling equipment and related plant and machinery.

The market demands **high quality chains** and **expert installation**. John King Chains uniquely **offer both**. Make the most of it.

- **Secure optimum reliability of your equipment** through **best quality chains** and **conveyor component** spares.
- Take advantage of **the quickest deliveries of conveyor spares** of any manufacturer in the market.
- Let **the conveyor specialist** look after your equipment to ensure **optimum performance** and **service life**.
- Allow us to highlight technical improvement **to enhance performance of your existing equipment**.
- Enter into **a professional partnership** to develop a service strategy tailored to suit your needs.



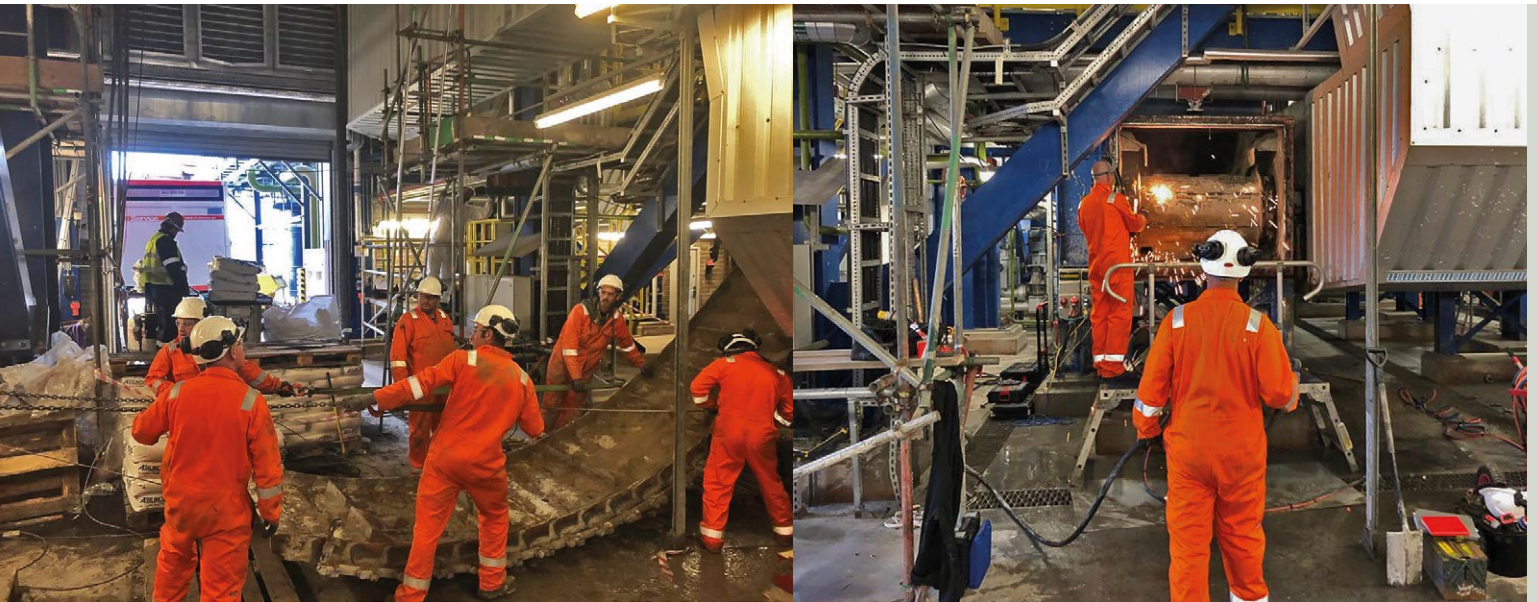

Site Services Scope of Supply.

- **Inspection and maintenance** of all mechanical handling equipment by specialist engineers
- **Trouble shooting** and problem solving within mechanical handling equipment.
- **Supply of high quality conveyor chain** and related conveyor spares.
- **Specialist in supply of heat resistant components.**
- **In house laboratory** for material and heat treatment analysis with full metallurgical support.
- **Manufacture and installation of all types of fabrications** from pre-hardened plate, stainless steels or standard materials.
- **Replacement of sections or full conveyors and elevators** including manufacture and installation.
- **Design and construction of complete bulk handling equipment** including installation service.
- **Repair and maintenance** of all related plant and equipment.

Safety at Work.

We are committed to providing and maintaining a healthy and safe environment for all employees and to protect the safety of contractors, customers, visitors and all other persons affected by our operations.


This is achieved by assessing all significant risks, designing safe systems of work and eliminating hazards where reasonably practicable. **This being encapsulated within the company HSE policy and enshrined in the everyday culture of our business.**



Cane Harvester Chains.



Climax harvester chains come from the British standard BS4116 but include heat treated sidebars for 'double strength' and case carburised pins, bushes and rollers for optimum abrasion resistance. Chains are HP series denoting hollow bearing pin to allow cross rods or bolts to be fitted through the chain strands.

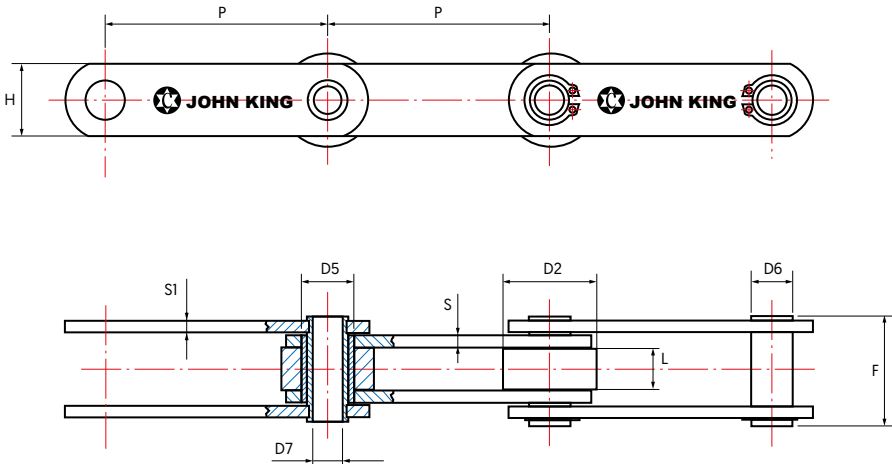

Cane Harvester Chains													
Chain Number	Units	Pitch	Rollers	Bushings	Pins	Hollow Pins	Overall Width	Between Sidebars	Sidebars			Breaking Load	Weight
			Diameter						Thickness		Height		
		P	D2	D5	D6	D7	F	L	S	S1	H		
HP27/0508/P	mm	50.80	31.80	18.03	13.97	10.16	44.00	15.00	4.00	4.00	25.00	2,700 kg	4.00 kg/m
	in	2.00	1.25	0.71	0.55	0.40	1.73	0.59	0.16	0.16	0.98	6,000 lb	2.68 lb/ft
HP27/0508/R1.5	mm	50.80	38.10	18.03	13.97	10.16	44.00	15.00	4.00	4.00	25.00	2,700 kg	4.20 kg/m
	in	2.00	1.25	0.71	0.55	0.40	1.73	0.59	0.16	0.16	0.98	6,000 lb	2.86 lb/ft
HP55/0635/P	mm	63.50	47.63	23.62	19.05	13.20	51.80	19.05	5.00	4.00	40.00	5,500 kg	3.80 kg/m
	in	2.50	1.87	0.93	0.75	0.52	2.01	0.75	0.20	0.16	1.57	12,000 lb	2.20 lb/ft



Welded Steel Chains for Feed and Washing Tables.



King Welded Steel Chain is exclusively manufactured in the WH fully heat treated specification to ensure maximum performance in high duty sugar mill applications.

Generally employed on feed and washing tables the chain utilises an S1 pusher although other attachments can be employed.

John King uniquely offer an up-rated IBR specification utilising induction hardened pin and bush for best performance.

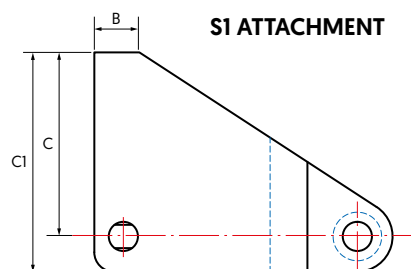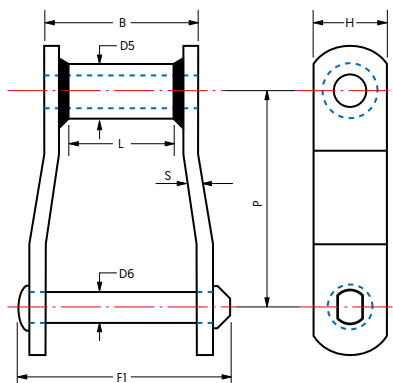

Welded Steel Chains for Feed and Washing Tables


Chain Number	Units	Pitch	Bushings	Pins	Overall Width	Bearing Width	Between Sidebars	Sidebars		S1 Attachment Dimensions			Working Load	Breaking Load	Weight
			Diameter					Thickness	Height						
		P	D5	D6	F	F1	L	S	H	B	C	C1			
WH78R	mm	66.30	22.20	12.70	78.20	50.80	25.40	6.40	31.80	12.70	88.90	101.60	1,350 kg	15,000 kg	5.70 kg/m
	in	2.61	0.88	0.50	3.00	2.00	1.00	0.25	1.25	0.50	3.50	4.00	3,000 lb	33,000 lb	3.80 lb/ft
WH82R	mm	78.10	27.00	14.30	84.10	57.20	34.90	6.40	31.80	12.70	85.60	101.60	2,000 kg	16,400 kg	6.00 kg/m
	in	3.08	1.06	0.56	3.31	2.25	1.38	0.25	1.25	0.50	3.37	4.00	4,400 lb	36,000 lb	4.00 lb/ft
WH124R	mm	101.60	31.80	19.10	108.00	74.40	38.10	9.50	88.10	24.50	95.30	114.30	3,350 kg	26,000 kg	11.70 kg/m
	in	4.00	1.25	0.75	4.25	2.81	1.50	0.38	1.50	1.00	3.75	4.50	7,350 lb	57,000 lb	8.50 lb/ft
WH124XDR	mm	103.20	41.10	25.40	120.60	76.20	41.10	12.70	50.80	25.40	95.30	120.70	4,773 kg	45,455 kg	21.90 kg/m
	in	4.06	1.62	1.00	4.75	3.00	1.62	0.50	2.00	1.00	3.75	4.75	10,500 lb	100,000 lb	14.70 lb/ft
WH111R	mm	120.90	31.80	19.10	104.80	122.20	47.60	9.50	88.10	25.40	107.90	127.00	3,800 kg	27,000 kg	14.20 kg/m
	in	4.76	1.25	0.75	4.81	4.81	1.88	0.38	1.50	1.00	4.25	5.00	8,850 lb	60,000 lb	9.50 lb/ft
WH106R	mm	152.40	31.80	19.10	108.00	71.40	38.10	9.50	88.10	25.40	95.30	114.30	3,350 kg	27,000 kg	10.40 kg/m
	in	6.00	1.25	0.75	4.25	2.81	1.50	0.38	1.50	1.00	3.75	4.50	7,350 lb	60,000 lb	7.00 lb/ft
WH110R	mm	152.40	31.70	19.05	117.30	76.20	47.70	9.65	31.70	25.40	95.30	114.30	3,580 kg	31,360 kg	10.70 kg/m
	in	6.00	1.25	0.75	4.62	3.00	1.88	0.38	1.25	1.00	3.75	4.50	7,875 lb	69,000 lb	7.20 lb/ft
WH106XHDR	mm	153.60	41.10	25.40	123.90	76.20	41.10	12.70	50.80	25.40	95.30	120.70	4,770 kg	52,270 kg	17.60 kg/m
	in	6.05	1.62	1.00	4.88	3.00	1.62	0.50	2.00	1.00	3.75	4.75	10,500 lb	111,000 lb	11.80 lb/ft
WH132R	mm	153.70	44.50	25.40	158.80	112.30	73.00	12.70	50.80	25.40	127.00	152.40	6,800 kg	55,400 kg	21.20 kg/m
	in	6.05	1.75	1.00	6.25	4.42	2.88	0.50	2.00	1.00	5.00	6.00	15,000 lb	122,000 lb	14.20 lb/ft
WH150R	mm	153.67	41.10	25.40	158.70	111.20	76.20	12.70	63.50	29.50	133.40	165.10	6,950 kg	52,700 kg	25.10 kg/m
	in	6.05	1.62	1.00	6.25	4.38	3.00	0.50	2.50	1.16	5.25	6.50	15,300 lb	116,000 lb	16.80 lb/ft
WH155R	mm	153.67	41.10	28.40	158.70	111.20	73.20	12.70	63.50	38.10	133.40	165.10	8,270 kg	68,640 kg	29.40 kg/m
	in	6.05	1.62	1.12	6.25	4.38	2.88	0.50	2.50	1.50	5.25	6.50	18,200 lb	151,000 lb	19.70 lb/ft
WH150XHDR	mm	153.67	41.10	28.40	171.40	117.30	76.20	15.70	63.50	25.40	139.30	171.40	8,270 kg	73,182 kg	29.40 kg/m
	in	6.05	1.62	1.12	6.75	4.62	3.00	0.62	2.50	1.00	5.50	6.75	18,200 lb	161,000 lb	19.70 lb/ft




Combination Chains for Feed and Washing Tables.



This series employs a cast block with steel sidebars. Blocks are available in King JK/WR1 grade or stainless steel to special order. The one piece construction of the block makes the combination chain an ideal choice to counter impact and abrasion.

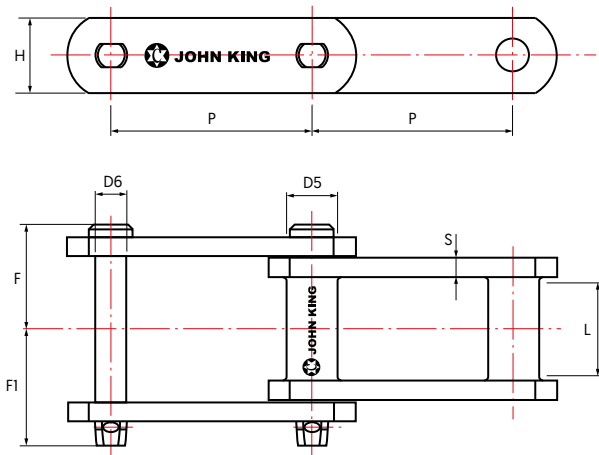

S1 ATTACHMENT

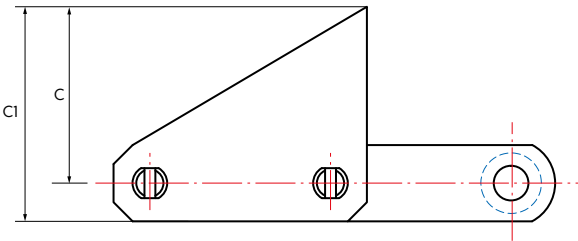


Combination Chains for Feed and Washing Tables													
Chain Number	Units	Pitch	Bushings	Pins	Overall Width	Bearing Width	Between Sidebars	Sidebars		S1 Attachment Dimensions		Breaking Load	Weight
			Diameter					Thickness	Height				
		P	D5	D6				F	F1	L	S		
C188	mm	66.27	22.22	12.70	31.75	41.90	23.88	6.00	28.70	—	—	6,400 kg	5.22 kg/m
	in	2.61	0.88	0.50	1.25	1.63	0.94	0.25	1.13	—	—	14,000 lb	3.50 lb/ft
C131	mm	78.10	31.75	15.90	49.20	42.90	28.60	9.50	38.10	82.55	101.60	11,900 kg	10.00 kg/m
	in	3.08	1.25	0.63	1.94	1.69	1.13	0.38	1.50	3.25	4.00	24,000 lb	6.70 lb/ft
C102	mm	101.60	25.40	15.90	57.20	54.00	47.60	9.50	38.10	95.25	114.30	11,900 kg	11.15 kg/m
	in	4.00	1.00	0.63	2.25	2.13	1.88	0.38	1.50	3.75	4.50	24,000 lb	7.48 lb/ft
C111	mm	121.90	36.58	19.10	66.70	60.30	54.00	9.50	44.50	111.25	133.35	16,400 kg	13.87 kg/m
	in	4.76	1.44	0.75	2.63	2.38	2.13	0.38	1.75	4.28	5.25	36,000 lb	9.30 lb/ft
C110	mm	152.40	31.75	15.90	55.60	52.40	47.60	9.50	38.10	107.95	127.50	11,900 kg	8.79 kg/m
	in	6.00	1.25	0.63	2.19	2.06	1.88	0.38	1.50	4.25	5.00	24,000 lb	5.90 lb/ft
C132	mm	153.90	43.69	25.40	82.60	81.00	79.40	12.70	50.80	127.00	152.40	22,700 kg	19.52 kg/m
	in	6.06	1.72	1.00	3.25	3.19	3.13	0.50	2.00	5.00	6.00	50,000 lb	13.09 lb/ft
C132	mm	153.90	43.69	25.40	82.60	81.00	79.40	12.70	50.80	203.20	228.60	22,700 kg	19.52 kg/m
	in	6.06	1.72	1.00	3.25	3.19	3.13	0.50	2.00	8.00	9.00	50,000 lb	13.09 lb/ft
C132	mm	153.90	43.69	25.40	82.60	81.00	79.40	12.70	50.80	254.00	279.40	22,700 kg	19.52 kg/m
	in	6.06	1.72	1.00	3.25	3.19	3.13	0.50	2.00	10.00	11.00	50,000 lb	13.09 lb/ft



Drop Forged Chains for Feed and Washing Tables.





This chain is of robust and simple construction makes it most suitable in cane infeed conveyors. The chain can be turned to provide new sliding surfaces and pin rotated 180 degrees allowing unworn diameter to contact with inner link, thus increasing the effective life of the chain. Normally components are from heat treated high alloy steel and sold under the John King MAXITUFF brand.

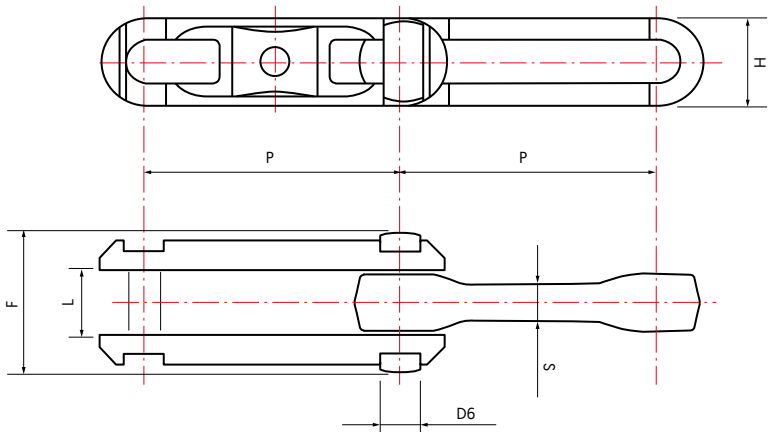

Drop Forged Chains for Feed and Washing Tables									
Chain Number	Units	Pitch	Pins	Overall Width	Between Sidebars	Sidebars		Breaking Load	Weight
			Diameter			Thickness	Height		
		P	D6	F	L	S	H		
X348	mm	76.60	12.70	44.50	19.10	12.70	27.00	10,100 kg	3.28 kg/m
	in	3.02	0.50	1.75	0.75	0.50	1.06	24,000 lb	2.20 lb/ft
X458	mm	102.40	15.90	57.20	26.20	15.90	34.90	21,800 kg	4.80 kg/m
	in	4.03	0.63	2.25	1.03	0.63	1.38	48,000 lb	3.21 lb/ft
X678	mm	153.20	22.20	76.20	33.30	22.20	50.10	56,800 kg	9.98 kg/m
	in	6.03	0.88	3.00	1.31	0.88	2.00	125,000 lb	6.69 lb/ft
698	mm	153.20	28.58	95.30	39.70	25.40	68.30	80,000 kg	17.00 kg/m
	in	6.03	1.125	3.75	1.56	1.00	2.69	175,000 lb	11.40 lb/ft
998	mm	229.40	28.58	95.30	39.70	68.30	68.30	68,000 kg	13.40 kg/m
	in	9.03	1.125	3.75	1.56	2.69	2.69	150,000 lb	8.99 lb/ft

Main Cane and Auxilliary Carrier Chains.

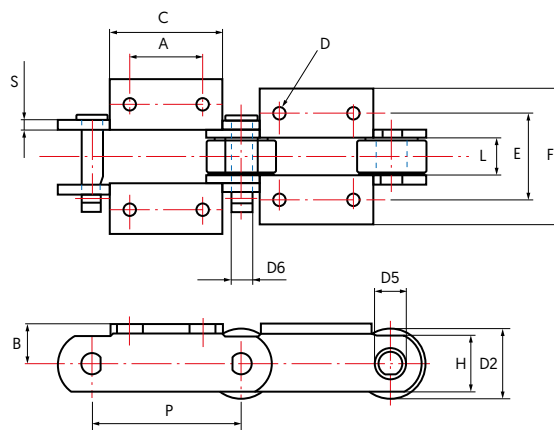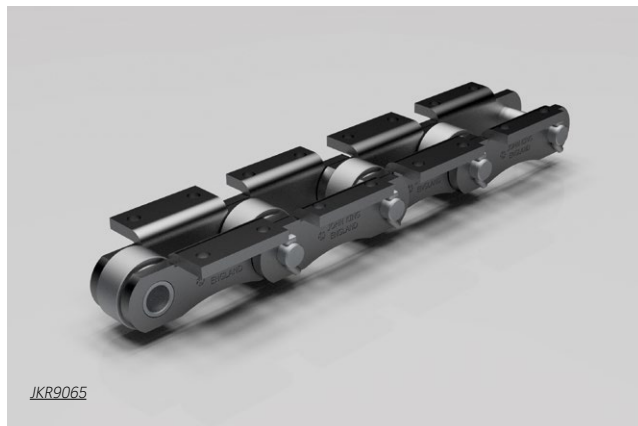


King cane carrier chains are fabricated engineering class chains designed to meet the most demanding service requirements in sugar mills. Experience allows King to select optimum materials and heat treatment conditions to maximise reliability and service life. "Climax" calibration during manufacture ensures accurate matching of strands for duplex or triplex operation.


Main Cane and Auxilliary Carrier Conveyors

Chain Number	Units	Pitch	Rollers	Bushings	Pins	Between Sidebars	Sidebars		K2 Attachment Dimensions					Bolt Diameter	Working Load	Breaking Load	Weight
			Diameter				Thick-ness	Height									
		P	D2	D5	D6	L	S	H	A	B	C	E	F	D			
JKR0904	mm	101.60	50.80	25.40	17.50	50.80	7.90	44.50	59.95	31.75	101.66	88.90	104.90	10.00	2,200 kg	18,200 kg	13.75 kg/m
	in	4.00	2.00	1.00	0.69	2.00	0.31	1.75	2.36	1.25	4.00	3.50	4.13	0.38	4,850 lb	40,000 lb	9.22 lb/ft
JKR2124	mm	152.40	69.85	28.70	19.05	38.90	9.70	50.80	76.20	41.14	114.30	111.30	142.70	12.80	2,750 kg	28,636 kg	17.60 kg/m
	in	6.00	2.75	1.13	0.75	0.53	0.38	2.00	3.00	1.62	4.50	4.38	5.62	0.50	6,050 lb	63,000 lb	11.80 lb/ft
JKR09060	mm	152.40	69.85	28.70	19.10	38.10	9.70	50.80	76.20	111.30	114.30	111.30	171.45	—	2,900 kg	27,200 kg	23.80 kg/m
	in	6.00	2.75	1.13	0.75	1.50	0.38	2.00	3.00	1.63	4.50	4.38	6.75	—	6,350 lb	60,000 lb	15.96 lb/ft
JKR2129	mm	228.60	82.50	33.02	19.05	37.10	9.50	57.20	101.60	44.95	152.40	146.00	208.70	15.24	3,300 kg	30,000 kg	29.65 kg/m
	in	9.00	3.25	1.30	0.75	1.46	0.38	2.25	4.00	1.77	6.00	5.75	8.22	0.60	7,275 lb	66,000 lb	19.89 lb/ft
JKR2315	mm	228.60	76.20	38.10	22.40	43.00	9.50	63.50	139.70	44.95	177.80	152.40	211.00	13.97	3,500 kg	32,000 kg	25.36 kg/m
	in	9.00	3.00	1.50	0.88	1.69	0.38	2.50	5.50	1.77	7.00	6.00	8.31	0.55	7,700 lb	70,400 lb	17.00 lb/ft
JKR09061	mm	152.40	69.85	28.70	19.10	38.10	9.70	57.20	76.20	41.40	114.30	111.30	165.10	12.70	2,900 kg	38,600 kg	25.60 kg/m
	in	6.00	2.75	1.13	0.75	1.50	0.38	2.25	3.00	1.63	4.50	4.38	6.50	0.50	6,350 lb	85,000 lb	17.70 lb/ft
JKR2178	mm	152.40	69.85	31.08	22.40	38.90	9.65	57.15	76.20	41.14	114.30	111.30	142.70	12.70	3,227 kg	38,650 kg	22.80 kg/m
	in	6.00	2.75	1.25	0.88	1.50	0.38	2.25	3.00	1.62	4.50	4.38	5.62	0.50	7,000 lb	85,000 lb	15.30 lb/ft
JKR2800	mm	203.20	88.90	38.10	25.40	45.97	12.70	69.85	82.50	55.37	127.00	131.50	183.40	15.74	4,454 kg	42,727 kg	39.10 kg/m
	in	8.00	3.50	1.50	1.00	1.81	0.50	2.75	3.25	2.18	5.00	5.18	7.22	0.62	9,800 lb	94,000 lb	26.20 lb/ft
JKR2198	mm	152.40	69.85	33.02	22.40	38.10	12.70	57.15	76.20	41.14	114.60	111.30	152.40	12.70	3,480 kg	45,460 kg	27.10 kg/m
	in	6.00	2.75	1.30	0.88	1.50	0.50	2.25	3.00	1.62	4.50	4.38	6.00	0.50	8,300 lb	100,000 lb	18.21 lb/ft
JKR1796	mm	152.40	69.85	38.10	22.40	38.10	9.70	57.20	76.20	41.40	114.30	111.30	165.10	12.70	3,480 kg	45,460 kg	25.00 kg/m
	in	6.00	2.75	1.50	0.87	1.50	0.38	2.25	3.00	1.63	4.50	4.38	6.50	0.50	8,300 lb	100,000 lb	16.77 lb/ft
JKR2801	mm	203.10	88.90	38.10	25.40	66.30	9.70	69.85	82.60	60.50	146.10	152.40	187.55	16.00	5,409 kg	50,900 kg	44.70 kg/m
	in	8.00	3.50	1.50	1.00	2.61	0.38	2.75	3.25	2.38	5.75	6.00	7.38	0.62	11,900 lb	112,000 kg	30.00 lb/ft
JKR09063	mm	152.40	76.20	31.80	23.90	38.10	9.70	63.50	76.20	44.50	114.30	111.30	153.90	12.70	3,800 kg	63,500 kg	39.00 kg/m
	in	6.00	3.00	1.25	0.94	1.50	0.38	2.50	3.00	1.75	4.50	4.38	6.06	0.50	8,300 lb	140,000 lb	26.20 lb/ft
JKR2804	mm	203.20	108.00	47.63	38.10	92.50	12.70	88.90	82.60	69.90	146.10	193.50	237.20	16.00	11,045 kg	68,200 kg	70.10 kg/m
	in	8.00	4.25	1.88	1.50	3.64	0.50	3.50	3.25	2.75	5.75	7.62	9.34	0.62	24,300 lb	150,000 lb	47.00 lb/ft
JKR9066	mm	152.40	76.20	38.10	26.90	63.50	12.70	60.50	76.20	42.90	114.30	136.70	187.55	12.70	4,230 kg	72,700 kg	40.70 kg/m
	in	6.00	3.00	1.50	1.06	2.50	0.50	2.38	3.00	1.69	4.50	5.38	7.38	0.50	9,300 lb	160,000 lb	27.30 lb/ft
JKR9065	mm	152.40	76.20	38.10	26.90	38.10	12.70	60.50	76.20	42.90	114.30	111.30	165.10	12.70	4,230 kg	72,700 kg	40.70 kg/m
	in	6.00	3.00	1.50	1.06	1.50	0.50	2.38	3.00	1.69	4.50	4.38	6.50	0.50	9,300 lb	160,000 lb	27.30 lb/ft

Cobra style Chain for Main Cane and Auxilliary Carrier Chains.

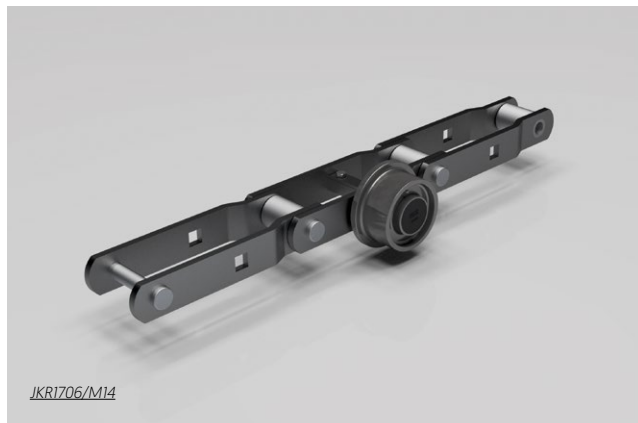

This most advanced design has obviated some of the traditional problems associated with the operation of cane carriers. Of robust construction, the "Cobra" style chain with outboard rollers offers the best impact resistance, load bearing capacity, ease of maintenance and extended service life. All components in addition to chain are available in this series including outboard rollers, pan support brackets, axles and slats.

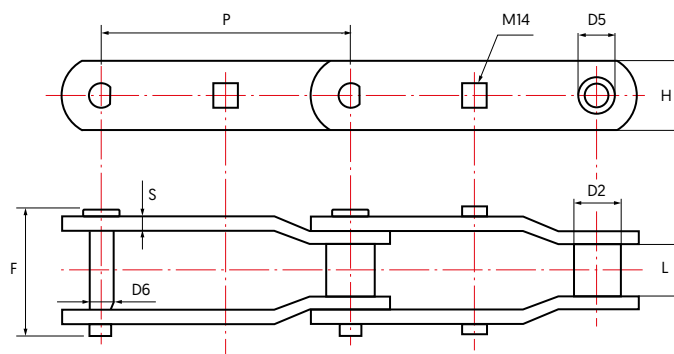

Cobra style Chain for Main Cane and Auxilliary Carrier Conveyors





Chain Number	Units	Pitch	Rollers	Bushings	Pins	Overall width	Between Sidebars	Sidebars		Square Hole	Working Load	Breaking Load	Weight
			Diameter					Thickness	Height				
		P	D2	D5	D6	F	L	S	H	M14			
JKR2397 M14	mm	304.80	44.45	31.75	22.40	119.85	55.60	9.52	63.50	19.05	4,200 kg	40,900 kg	14.16 kg/m
	in	12.00	1.75	1.25	0.88	4.71	2.18	0.38	2.50	0.75	9,420 lb	90,000 lb	9.79 lb/ft
JKR2358 M14	mm	228.60	44.60	31.75	22.40	123.95	49.30	12.70	63.50	25.40	4,091 kg	45,455 kg	15.20 kg/m
	in	9.00	1.75	1.25	0.88	4.88	1.94	0.50	2.50	1.00	14,000 lb	100,000 lb	10.20 lb/ft
JKR1706 M14	mm	304.80	57.20	38.10	25.40	148.30	76.20	12.70	63.50	25.40	6,364 kg	45,455 kg	6.00 kg/m
	In	12.00	2.25	1.50	1.00	5.84	3.00	0.50	2.50	1.00	14,000 lb	100,000 lb	4.02 lb/ft
JKR2614 M14	mm	304.80	63.50	44.45	31.75	160.50	69.85	15.70	88.90	31.80	7,955 kg	61,364 kg	11.00 kg/m
	in	12.00	2.50	1.75	1.25	6.31	2.75	0.62	3.50	1.25	17,000 lb	135,000 lb	73.70 lb/ft
JKR1227 M14	mm	304.80	79.38	47.63	38.10	161.50	70.60	15.70	101.60	31.80	10,091 kg	100,000 kg	12.00 kg/m
	in	12.00	3.12	1.88	1.50	6.35	2.78	0.62	4.00	1.25	14,000 lb	220,000 lb	8.04 lb/ft
JKR2630 M14	mm	304.80	63.50	47.63	34.90	148.30	69.85	15.70	88.90	31.80	9,500 kg	135,000 kg	35.16 kg/m
	in	12.00	2.50	1.88	1.37	5.84	2.75	0.62	3.50	1.25	35,000 lb	300,000 lb	23.58 lb/ft
JKR1223 M14	mm	304.80	88.90	47.63	38.10	195.58	104.60	15.70	101.60	31.80	15,909 kg	136,364 kg	45.80 kg/m
	in	12.00	3.50	1.88	1.50	7.70	4.12	0.62	4.00	1.25	35,000 lb	300,000 lb	30.71 lb/ft
JKR2778 M14	mm	304.80	63.50	47.63	34.90	161.93	101.60	15.70	101.60	31.80	8,750 kg	147,700 kg	38.20 kg/m
	in	12.00	2.50	1.88	1.37	6.37	4.00	0.62	4.00	1.25	19,250 lb	325,000 lb	25.62 lb/ft
JKR2648 M14	mm	304.80	82.55	55.62	41.28	197.60	92.08	19.05	101.60	31.80	13,454 kg	159,090 kg	53.52 kg/m
	in	12.00	3.25	2.19	1.62	7.78	3.62	0.75	4.00	1.25	30,000 kg	350,000 lb	35.90 lb/ft

Intermediate Carrier and Bagasse Transport Roller Conveyor Chains.



King intermediate carrier chains operate in the most corrosive conditions brought about by continuous operation in raw sugar juice. As a consequence chains employ corrosion resistant materials. The swivel attachments allows for self alignment of the strands during operation compensating for any mismatch.

ROLLER CONVEYOR WITH AS2 ATTACHMENTS

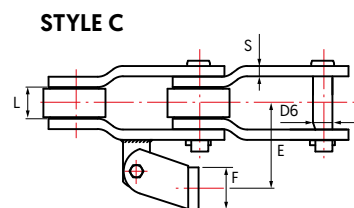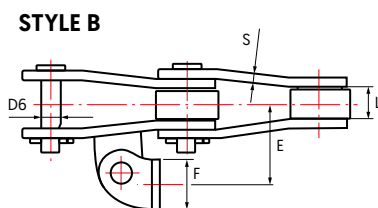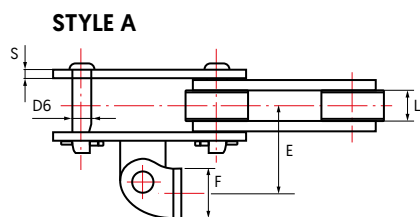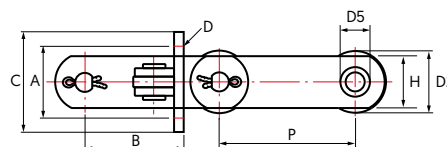


Intermediate Carrier and Bagasse Transport Roller Conveyor Chains

Chain Number	Style	Units	Pitch	Rollers	Bush- ing	Pins	Be- tween Side- bars	Sidebar		AS2 Attachment Dimensions					Bolt Diam- eter	Working Load	Breaking Load	Weight
								Thick- ness	Height									
			P	D2	D5	D6	L	S	H	A	B	C	E	F	D			
JKR0904	A/B	mm	101.60	50.80	25.40	17.53	31.00	7.87	44.50	82.30	79.50	107.95	77.72	45.50	9.65	2,200 kg	18,200 kg	12.10 kg/m
		in	4.00	2.00	1.00	0.69	1.22	0.31	1.75	3.24	3.13	4.25	3.06	1.75	0.38	4,850 lb	40,000 lb	8.11 lb/ft
JKR09060	A/B	mm	152.40	69.85	28.70	19.05	38.10	9.65	50.80	82.55	111.25	114.30	88.90	50.80	12.70	2,900 kg	27,200 kg	16.70 kg/m
		in	6.00	2.75	1.13	0.75	1.50	0.38	2.00	3.25	4.38	4.50	3.50	2.00	0.50	6,350 lb	60,000 lb	11.20 lb/ft
JKR2184	B	mm	152.40	76.20	31.75	22.35	35.05	9.65	50.80	88.90	142.75	127.00	91.95	50.80	12.70	3,000 kg	36,600 kg	18.50 kg/m
		in	6.00	3.00	1.25	0.88	1.38	0.38	2.00	3.50	5.62	5.00	3.62	2.00	0.50	6,500 lb	85,000 lb	12.41 lb/ft
JKR09061	A/B	mm	152.40	69.85	28.70	19.10	38.10	9.65	57.50	82.55	111.25	114.30	88.90	50.80	12.70	2,900 kg	38,600 kg	18.50 kg/m
		in	6.00	2.75	1.13	0.75	1.50	0.38	2.25	3.25	4.38	4.50	3.50	2.00	0.50	6,350 lb	85,000 lb	12.41 lb/ft
JKR9184	C	mm	152.40	76.20	31.80	23.90	38.90	12.70	63.50	88.90	142.75	127.00	104.60	50.80	12.70	3,800 kg	45,400 kg	26.20 kg/m
		in	6.00	3.00	1.25	0.94	1.53	0.50	2.50	3.50	5.62	5.00	4.12	2.00	0.50	8,300 lb	100,000 lb	17.57 lb/ft
JKR9185	C	mm	152.40	88.90	31.80	23.90	38.90	12.70	63.50	88.90	142.75	127.00	104.60	50.80	12.70	3,800 kg	45,400 kg	30.70 kg/m
		in	6.00	3.50	1.25	0.94	1.53	0.50	2.50	3.50	5.62	5.00	4.12	2.00	0.50	8,300 lb	100,000 lb	20.59 lb/ft
JKR1796	A/B	mm	152.40	69.85	31.80	22.35	38.10	9.65	57.15	82.55	111.25	114.30	88.90	50.80	12.70	3,800 kg	45,400 kg	25.18 kg/m
		in	6.00	2.75	1.25	0.88	1.50	0.38	2.25	3.25	4.38	4.50	3.50	2.00	0.50	8,300 lb	100,000 lb	16.88 lb/ft
JKR09063	A/B	mm	152.40	76.20	31.80	23.89	38.10	10.40	60.45	88.90	142.75	127.00	104.65	50.80	12.70	3,800 kg	63,500 kg	28.95 kg/m
		in	6.00	3.00	1.25	0.94	1.50	0.41	2.38	3.50	5.62	5.00	4.12	2.00	0.50	8,300 lb	140,000 lb	19.42 lb/ft
JKR2198	A/B	mm	152.40	69.85	31.80	22.35	38.10	12.70	57.15	88.90	142.75	127.00	98.55	50.80	12.70	3,800 kg	45,400 kg	26.50 kg/m
		in	6.00	2.75	1.25	0.88	1.50	0.50	2.25	3.50	5.62	5.00	3.88	2.00	0.50	8,300 lb	100,000 lb	17.77 lb/ft
JKR2113	B	mm	102.62	50.80	25.40	17.53	33.27	7.87	50.80	69.85	141.22	120.65	85.85	50.80	12.70	2,100 kg	11,800 kg	12.70 kg/m
		in	4.04	2.00	1.00	0.69	1.31	0.31	2.00	2.75	5.56	4.75	3.38	2.00	0.50	4,685 lb	26,000 lb	8.52 lb/ft
JKR9065	A	mm	152.40	76.20	38.10	26.92	38.10	12.70	60.45	84.07	111.25	114.30	91.69	50.80	12.70	4,200 kg	72,700 kg	29.00 kg/m
		in	6.00	3.00	1.50	1.06	1.50	0.50	2.38	3.31	4.38	4.50	3.61	2.00	0.50	9,275 lb	160,000 lb	19.45 lb/ft
JKR2178A	B	mm	152.40	69.85	31.80	22.23	38.10	9.65	57.15	88.90	142.75	127.00	104.65	50.80	12.70	3,800 kg	45,400 kg	19.20 kg/m
		in	6.00	2.75	1.25	0.88	1.50	0.38	2.25	3.50	5.62	5.00	4.12	2.00	0.50	8,300 lb	100,000 lb	12.88 lb/ft

Crank Link Steel Bush Series for Inter-carriers.




The JKB series was developed for Megasse and Bagasse handling within cane sugar processing. The chain is generally employed, but not exclusively, with F style attachment to allow a flight bar to be mounted across the chains. The flight bar will incorporate a wear shoe so the chain does not come into contact directly with wear strips or conveyor deck. The chain is purely the haulage member and it does not therefore have a need for a carrier roller. The simplified bush construction with standard or stainless round parts has proven to offer extended and economic performance.

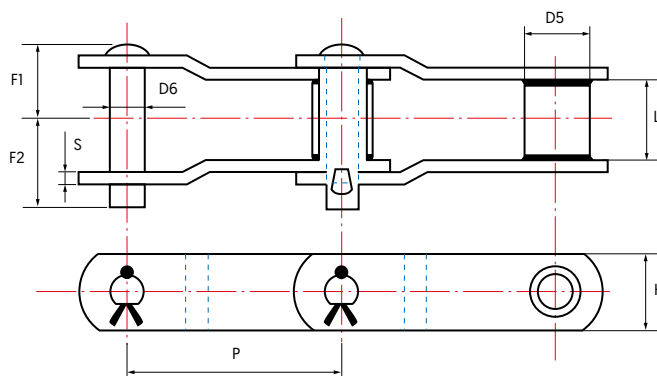

Crank Link Steel Bush Series for Inter-carriers

Chain Number	Chain Standard	Units	Pitch	Bushing	Pins	Over Pin		Between Sidebars	Sidebars		Working Load	Breaking Load	Weight
				Diameter					Thickness	Height			
				P	D5	D6	F1	F2	L	S			
JKB160	BOP	mm	160.00	48.00	25.40	56.00	66.00	56.00	9.50	57.30	3,100 kg	34,600 kg	17.50 kg/m
		in	6.30	1.89	1.00	2.20	2.56	2.20	0.37	2.25	6,850 lb	76,120 lb	11.74 lb/ft
JKB160A	BOP	mm	160.00	48.00	25.40	56.00	66.00	56.00	9.50	63.50	4,730 kg	45,500 kg	19.20 kg/m
		in	6.30	1.89	1.00	2.20	2.56	2.20	0.37	2.50	10,400 lb	100,000 lb	12.88 lb/ft
JKB200	BOP	mm	200.00	48.00	25.40	56.00	66.00	56.00	9.50	57.20	3,100 kg	34,600 kg	15.50 kg/m
		in	7.87	1.89	1.00	2.20	2.56	2.20	0.37	2.25	6,850 lb	76,120 lb	10.39 lb/ft
JKB200A	BOP	mm	200.00	48.00	25.40	56.00	66.00	56.00	9.50	63.50	4,730 kg	45,500 kg	17.40 kg/m
		in	7.87	1.89	1.00	2.20	2.56	2.20	0.37	2.50	10,400 lb	100,000 lb	11.67 lb/ft
JKB37291J	Donelly	mm	152.40	50.80	25.40	55.90	67.10	50.00	12.70	76.20	4,730 kg	45,500 kg	24.60 kg/m
		in	6.00	2.00	1.00	2.20	2.64	1.96	0.50	3.00	10,400 lb	100,000 lb	16.50 lb/ft
JKB6050*	Donelly	mm	153.70	49.00	25.40	55.90	67.10	50.00	12.70	76.20	4,730 kg	45,500 kg	24.60 kg/m
		in	6.05	1.93	1.00	2.20	2.64	1.96	0.50	3.00	10,400 lb	100,000 lb	16.50 lb/ft
JKB37291SJ	Donelly	mm	152.40	50.80	25.40	62.20	73.40	50.00	12.70	76.20	4,730 kg	45,500 kg	24.60 kg/m
		in	6.00	2.00	1.00	2.44	2.88	1.96	0.50	3.00	10,400 lb	100,000 lb	16.50 lb/ft
JKB2084HD	Donelly	mm	125.40	76.20	23.80	73.90	64.30	66.80	12.70	63.50	5,420 kg	45,500 kg	30.70 kg/m
		in	6.00	3.00	0.94	2.91	2.53	2.63	0.50	2.50	11,920 lb	100,000 lb	20.50 lb/ft


F Style attachment

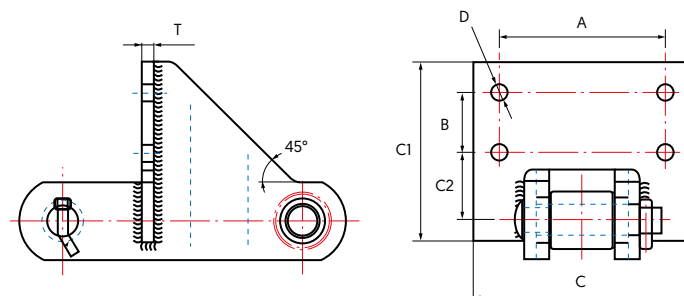

F Style attachment

Chain Number	Units	C1	C2	A	C	B	D	T
JKB160A	mm	136.00	59.00	108.00	148.00	50.00	14.00	16.00
	in	5.35	2.32	4.25	5.82	1.96	0.55	0.62
JKB160	mm	136.00	59.00	108.00	148.00	50.00	14.00	16.00
	in	5.35	2.32	4.25	5.82	1.96	0.55	0.62
JKB200A	mm	136.00	59.00	108.00	148.00	50.00	14.00	16.00
	in	5.35	2.32	4.25	5.82	1.96	0.55	0.62
JKB200	mm	136.00	59.00	108.00	148.00	50.00	14.00	16.00
	in	5.35	2.32	4.25	5.82	1.96	0.55	0.62

RF10 Style attachment

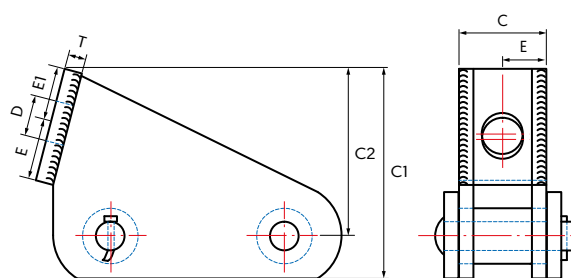


RF10 Style attachment

Chain Number	Units	C1	C2	C	E	E1	D	T
JKB3729I	mm	18.40	146.30	93.70	57.20	44.50	35.80	12.70
	in	7.26	5.76	3.69	2.25	1.75	1.41	0.50
JKB3729I J	mm	184.40	146.30	106.40	57.20	44.50	35.80	12.70
	in	7.26	5.76	4.19	2.25	1.75	1.41	0.50
JKB6050	mm	185.20	147.80	76.96	54.10	47.50	36.10	15.70
	in	7.29	5.82	3.03	2.13	1.87	1.42	0.62
JKB2084HD	mm	194.60	162.80	133.40	67.20	50.80	38.10	12.70
	in	7.66	6.41	5.25	2.25	2.00	1.50	0.50

Cast Link Chains for Inter-carriers and Sugar Mill applications.




Kings greatest strength lies in the extensive metallurgical experience notably in chains of cast construction. This series is available in standard JK/WRI or wider variety of materials enhanced through alloy addition finally to full austenitic stainless steel. Where the pintle class chains include a pressed bushing this allows for a combination of materials to maximise suitability and economy.

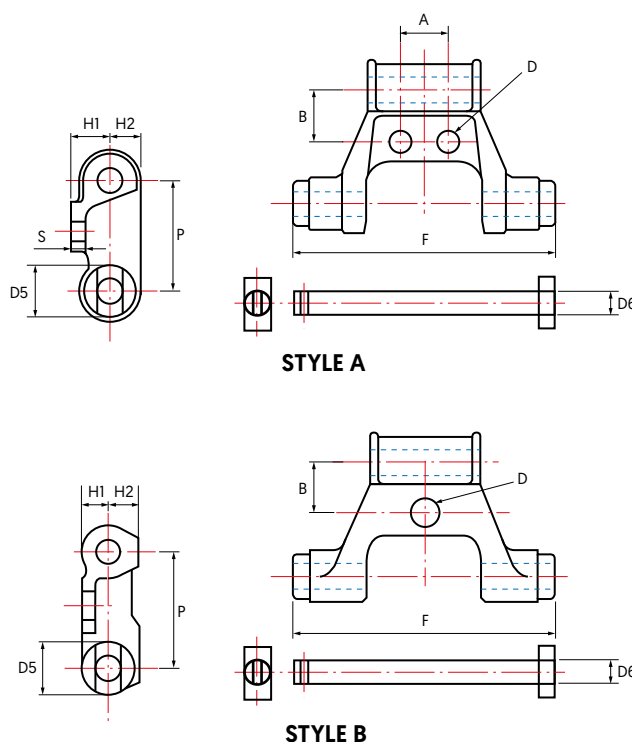


Cast Link Chains for Inter-carriers and Sugar Mill applications

Chain Number	Style	Units	Pitch P	Bushing Diameter		Over Pin F	Sidebars Thickness S	H1	H2	Bolt Diameter D	A	B	Working Load	Breaking Load
				D5	D6									
JK5174E4	A	mm	59.94	28.58	12.70	139.70	7.87	19.05	15.88	9.52	25.40	41.28	1,500 kg	10,200 kg
		in	2.36	1.13	0.50	5.50	0.31	0.75	0.63	0.38	1.00	1.63	3,300 lb	22,500 lb
JK901E41/E44	B	mm	79.98	35.27	15.88	139.70	9.65	23.80	18.29	12.70	27.69	44.45	4,200 kg	11,360 kg
		in	3.15	1.31	0.63	5.50	0.38	0.72	0.94	0.50	1.09	1.75	4,150 lb	25,000 lb
JK902E41/E44	B	mm	79.98	33.27	15.88	141.22	9.65	23.80	18.29	9.52	—	37.08	4,200 kg	11,360 kg
		in	3.15	1.31	0.63	5.56	0.38	0.72	0.94	0.38	—	1.46	4,150 lb	25,000 lb
JK907E51	B	mm	80.52	33.27	15.88	141.22	9.65	23.80	18.29	9.52	—	37.60	4,200 kg	11,360 kg
		in	3.17	1.31	0.63	5.56	0.38	0.72	0.94	0.38	—	1.48	4,150 lb	25,000 lb

Intermediate Carrier Chains Block and Bar Style.

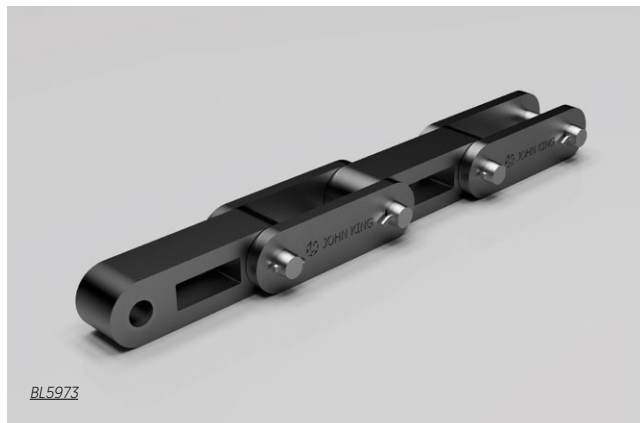

This new generation Intermediate Carrier Chain is a 'roller less' block link chain of robust and simple construction. Pin and bush from heat-treated Martensitic stainless steel, side plates from carbon steel, cast block link secondary heat treated JK/HT1. This austempered ductile iron offers optimum mechanical properties and strength weight ratio whilst exhibiting work hardening qualities.

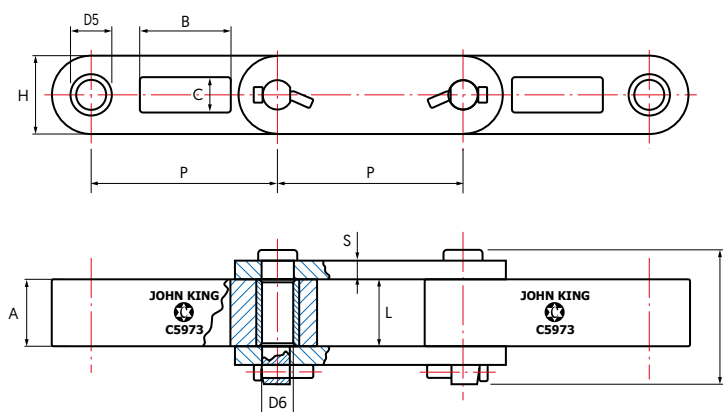


INTERMEDIATE CARRIER CHAIN SPECIAL C5973


Intermediate Carrier Chains Block and Bar Style

Chain Number	Units	Pitch	Bushing	Pins	Over Pin	Between Sidebars	Sidebars		A	B	C	Working Load	Breaking Load
			Diameter				Thickness	Height					
		P	D5	D6	F	L	S	H					
BL09060	mm	152.40	28.70	19.05	85.00	48.00	10.00	50.80	39.00	75.00	28.00	2,000 kg	27,200 kg
	in	6.00	1.13	0.75	3.35	1.50	0.38	2.00	1.50	2.95	1.10	4,400 lb	60,000 lb
BL1796	mm	152.40	31.75	22.10	95.80	50.80	10.00	60.00	49.50	75.00	28.00	2,550 kg	45,500 kg
	in	6.00	1.25	0.87	3.77	2.00	0.38	2.25	1.95	2.95	1.10	5,600 lb	100,000 lb
BL09063	mm	152.40	31.75	23.88	100.00	55.00	10.00	60.00	54.00	75.00	28.00	3,300 kg	63,600 kg
	in	600.00	1.25	0.97	3.93	2.18	0.41	2.38	2.83	2.95	1.10	7,200 lb	140,000 lb
BL5973	mm	152.40	34.50	25.40	110.00	55.00	15.00	65.00	54.00	75.00	28.00	3,300 kg	63,600 kg
	in	600.00	1.36	1.00	4.35	2.18	0.59	2.50	2.17	2.95	1.10	7,200 lb	140,000 lb

100B Link with Special attachment to be used as left and right hand strands.

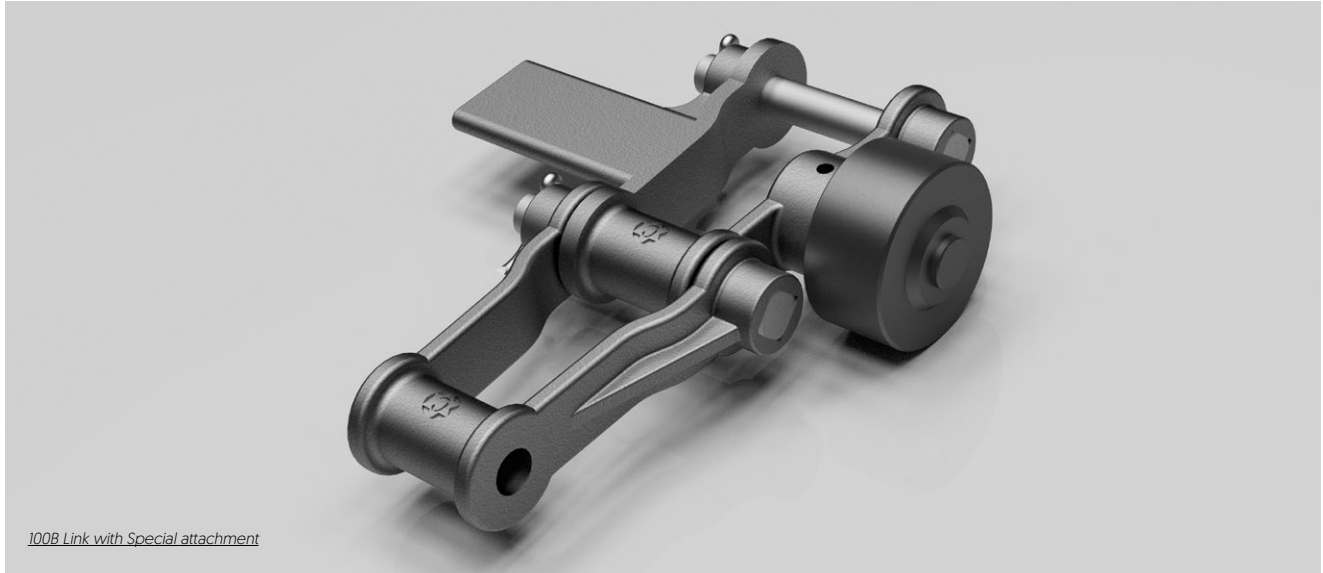

This non standard chain is a variation on DIN 654 and associated with one European original equipment manufacturer. The chain link is produced in an uprated cast steel offering enhanced mechanical properties over the original malleable iron specification where strength and wear performance were insubstantial. The version utilises handed attachments with outboard carrier rollers.

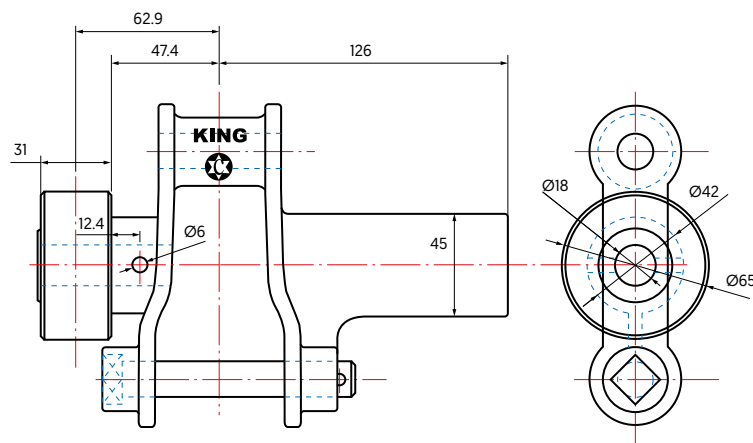





Intercarrier - Special Types.





Kings unique ability to produce bespoke chains converging the whole spectrum of construction, material and manufacturing processes allows the company to offer direct replacements to non-standard chains. This series is a good demonstration of this where the link is produced as a high carbon steel casting with alloy steel heat treated liner bush and bolted construction. In this process there is always the opportunity to introduce improvements for improved performance and cost effectiveness. Where requested this series can be offered as a forging complete with welded K4 top plate.

PLAIN LINK


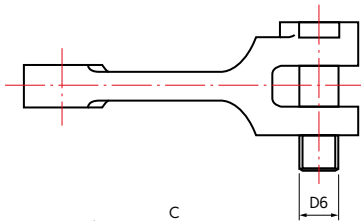
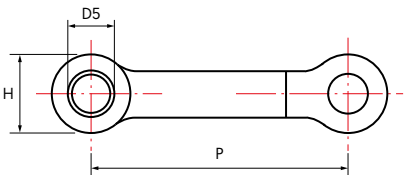


K4 ATTACHMENT LINK

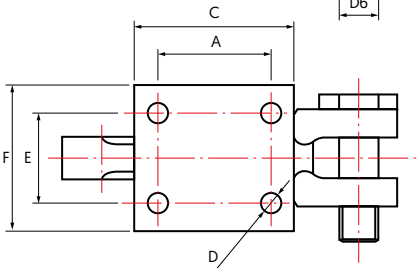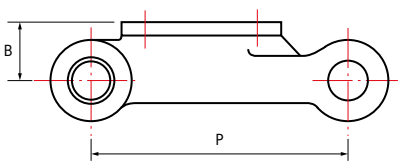


Intercarrier – Special Types												
Chain Number	Units	Pitch	Bushing	Pins	Height	K4 Attachment Dimensions					Bolt Diameter	Breaking Strength
			Diameter									
		P	D5	D6	H	A	B	C	E	F	D	
JK229	mm	228.60	35.05	41.40	69.85	101.60	50.08	139.70	79.38	130.18	16.00	60,000 kg
	in	9.00	1.38	1.63	2.75	4.00	2.00	5.50	3.13	5.13	0.63	132,000 lb
JK305	mm	304.80	45.45	57.15	101.60	107.95	74.62	187.45	92.08	127.00	16.00	88,200 kg
	in	12.00	1.75	2.25	4.00	4.25	2.94	7.38	3.63	5.00	0.63	194,000 lb

Diffuser Chains - Block and Bar Construction.

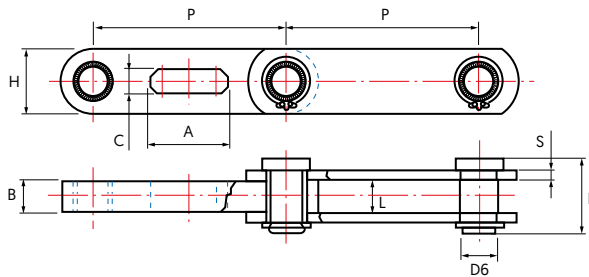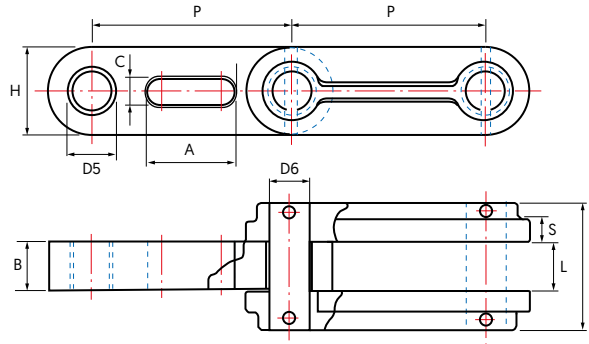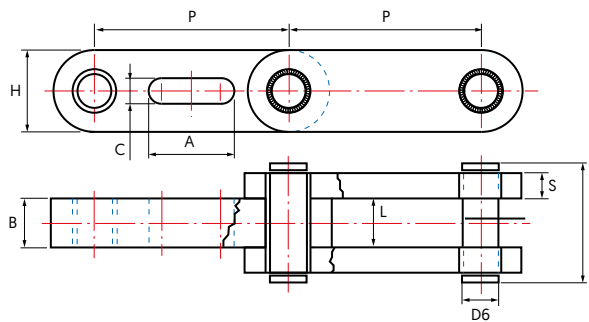



Diffuser Chains – Block and Bar Construction												
Chain Number	Units	Pitch	Bushing	Pins	Over Pin	Between Sidebars	Sidebars		A	B	C	Breaking Strength
			Diameter				Thickness	Height				
		P	D5	D6			F	L				
BL4309/T1	mm	250.00	56.00	47.00	150.00	62.00	20.00	80.00	111.00	60.00	35.00	175,000 kg
	in	9.84	2.20	1.85	5.90	2.44	0.75	3.15	4.37	2.36	1.38	385,000 lb
BL4309/T2	mm	250.00	51.00	42.00	100.00	43.00	12.00	80.00	111.00	40.00	35.00	64,240 kg
	in	9.84	2.00	1.65	3.94	1.69	0.50	3.15	4.37	1.57	1.38	141,323 lb
BL4600	mm	250.00	58.00	49.00	30.00	66.00	47.00	110.00	111.00	60.00	35.00	224,300 kg
	in	9.84	2.28	1.93	1.18	2.60	1.85	4.33	4.37	2.36	1.38	493,460 lb
BL4961	mm	300.00	71.90	60.00	157.50	68.00	31.00	130.00	125.00	60.00	25.00	345,000 kg
	in	11.80	2.83	2.36	6.20	2.68	1.22	5.12	4.92	2.36	1.00	759,000 lb
BL5032	mm	443.60	127.80	50.80	181.00	74.60	37.30	127.80	101.60	123.80	31.80	338,000 kg
	in	17.50	5.00	2.00	7.13	2.94	1.47	5.00	4.00	4.87	1.25	743,600 lb

Juice Strainer and Trash Conveyor Chains.


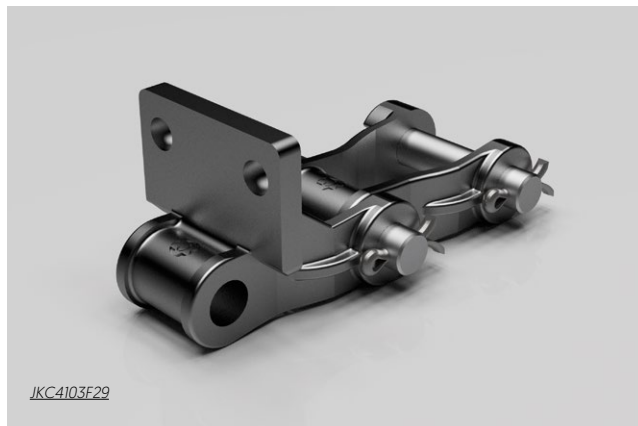


Cast pintle chains have been the traditional selection for juice strainers and trash elevators. Engineered steel chains have also been developed as a direct alternative. [E.g. 4103 F29 and E2103] to allow for higher mechanical characteristic and enhanced corrosion resistance. In addition Kings plastic division offer non-metallic alternatives that have proven performance in similar applications.



488F2



4103F29

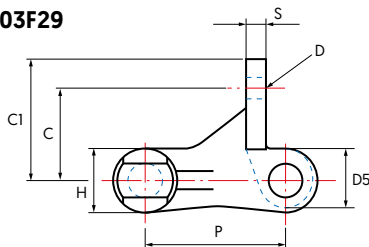

E2103

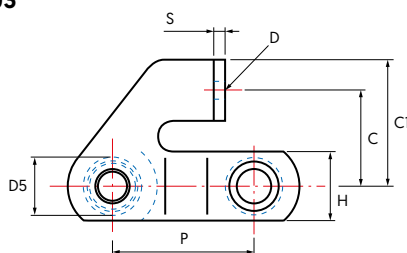


Juice Strainer and Trash Conveyor Chains

Chain Number	Units	Pitch	Bushing	Pins		Sidebars		A	B	C	C1	F	Bolt Diameter	Breaking Load	Breaking Strength	Weight	
			Diameter		Thickness	Height											
		P	D5	D6		S	H										
				dia.	length												
JKC488F2	mm	66.30	22.40	11.20	77.70	8.00	25.40	51.60	36.10	35.10	50.80	73.90	7.90	820 kg	5,000 kg	5.20 kg/m	9.20 kg/m
	in	2.61	0.88	0.44	3.06	0.31	1.00	2.03	1.42	1.38	2.00	2.94	0.31	1,800 lb	11,000 lb	3.49 lb/ft	6.18 lb/ft
JKC4103F29	mm	78.00	31.80	19.00	92.20	11.00	38.10	62.00	67.10	50.80	67.10	83.30	12.70	1,600 kg	10,000 kg	9.20 kg/m	13.10 kg/m
	in	3.07	1.25	0.75	3.63	0.44	1.50	2.44	2.64	2.02	2.64	3.00	0.50	3,500 lb	22,000 lb	6.18 lb/ft	8.80 lb/ft
JKC4103F30	mm	78.00	31.80	19.00	92.20	11.00	38.10	62.00	62.00	50.80	67.10	83.30	12.70	1,600 kg	10,000 kg	9.20 kg/m	13.10 kg/m
	in	3.07	1.25	0.75	3.63	0.44	1.50	2.44	2.44	2.02	2.64	3.00	0.50	3,500 lb	22,000 lb	6.18 lb/ft	8.80 lb/ft
E2103	mm	78.00	31.80	19.00	79.50	6.40	38.10	88.90	16.00	53.10	69.90	124.00	10.00	2,200 kg	13,100 kg	8.80 kg/m	13.90 kg/m
	in	3.07	1.25	0.75	3.13	0.25	1.50	3.50	0.63	2.09	2.75	4.88	0.40	4,900 lb	40,000 lb	5.91 lb/ft	9.34 lb/ft




Boiler Moving Grate Chains.

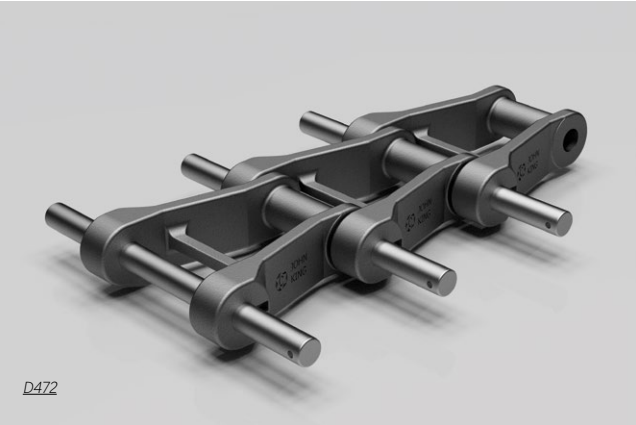


Kings cast chain tradition has allowed them to apply expertise in the development of improved materials for moving grate applications. This hostile environment demands a material that can perform at elevated temperatures and conditions of high abrasion. In addition to the running gear, the related grate castings are also available. Engineered steel versions are also manufactured such as the Thompson moving grate or stoker chains.

BABCOCK STYLE D472

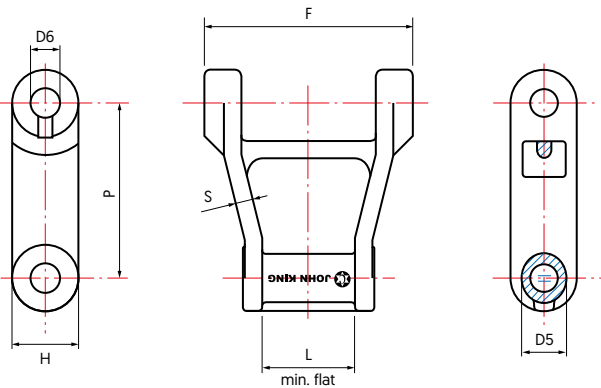

THOMPSON STYLE JK5063, JK5109


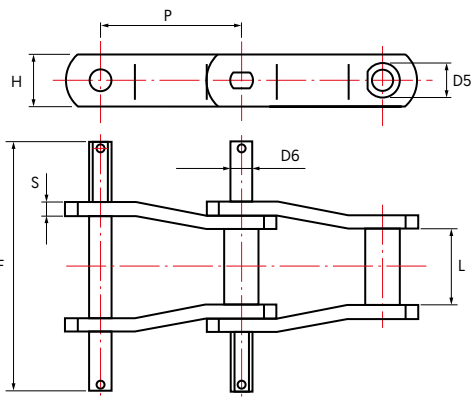


Boiler Moving Grate Chains									
Chain Number	Units	Pitch	Bushing	Pins	Over Pin	Between Sidebars	Sidebar Thickness	Sidebar Height	Breaking Load
			Diameter						
		P	D5	D6	F	L	S	H	
D472	mm	101.00	25.40	15.88	119.00	50.80	10.00	38.10	n/s
	in	3.98	1.00	0.63	4.69	2.00	0.38	1.50	n/s
JK5063	mm	101.60	25.40	15.70	179.30	54.10	10.00	38.10	22,700 kg
	in	4.00	1.00	0.63	7.06	2.13	0.38	1.50	50,000 lb
JK5109	mm	101.60	25.40	15.70	178.60	55.60	10.00	38.10	30,500 kg
	in	4.00	1.00	0.63	7.03	2.19	0.38	1.50	67,000 lb




Boiler Grate Chains.


King plate conveyor slats are manufactured for Main, Auxiliary and Intermediate Carrier chains. Using a progressive die-forming process a high degree of accuracy can be maintained to ensure consistency. The slats can be galvanised for increased resistance to the corrosive action of sugar cane acids.

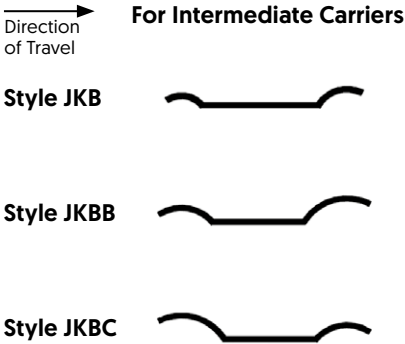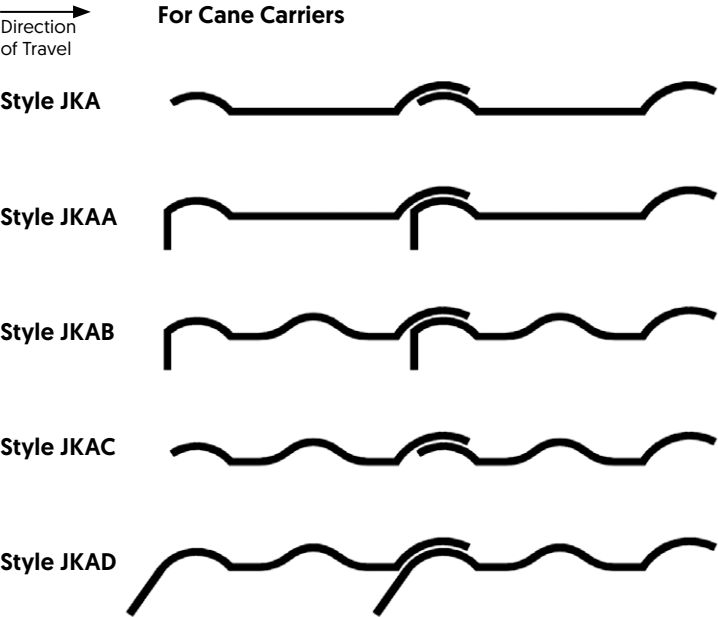

Climax Sprockets.




Sprockets with split construction



Sprockets of segmental construction

King operate a dedicated in house sprocket manufacturing division where chain sprockets are produced using latest technology. These are available in cast or fabricated form. Options of segmental or split construction allow for easy and cost effective replacement.


Typical Layout in Sugar Beet Diffuser Process.

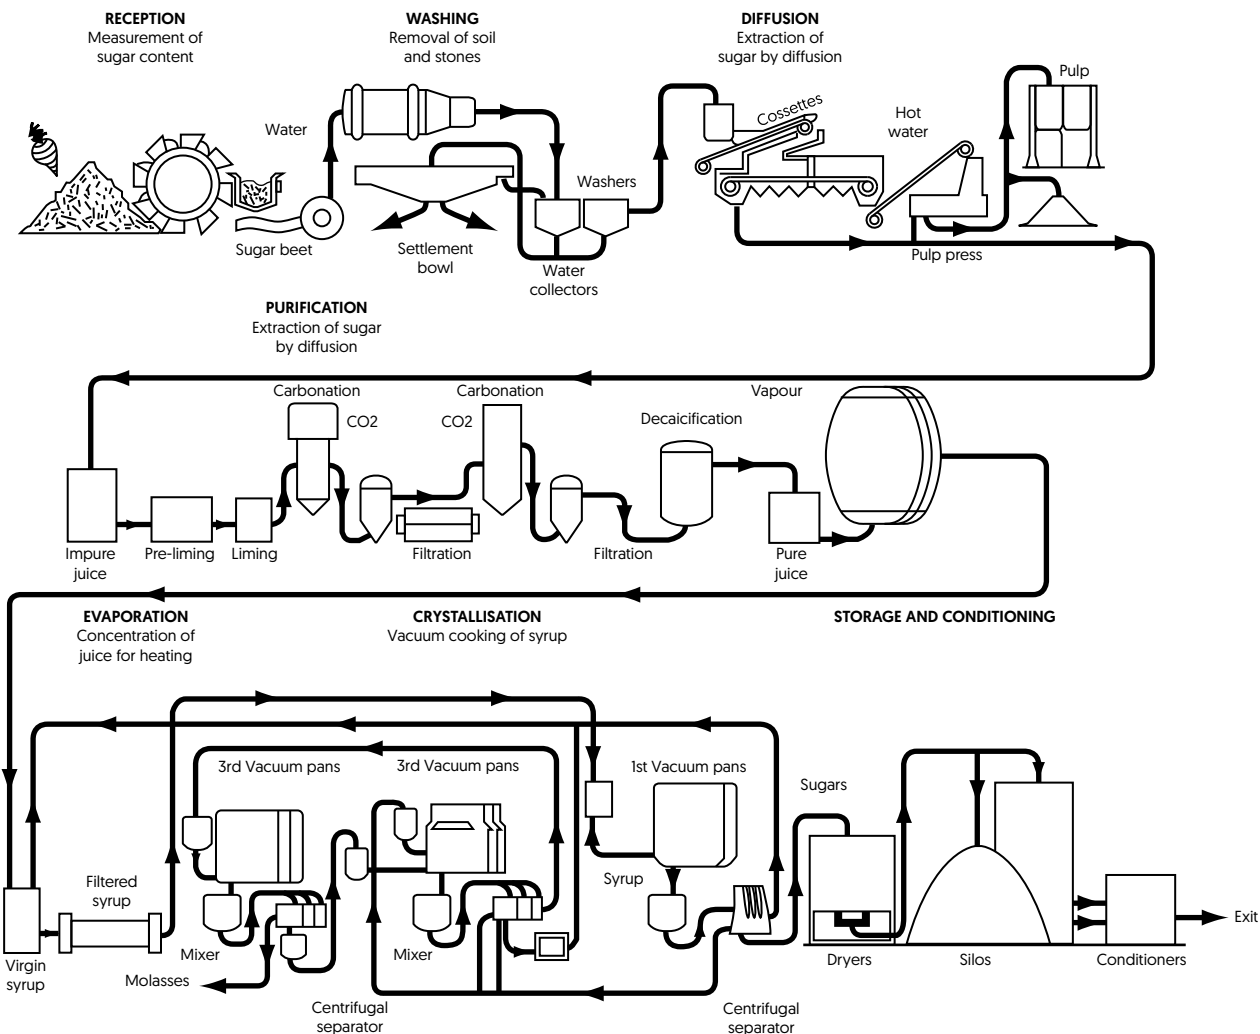

Trash Catcher.




Washing Area: Within the washer a water flume carries away debris washed from the sugar beet. The chain fitted with rakes, removes the trash from the water.

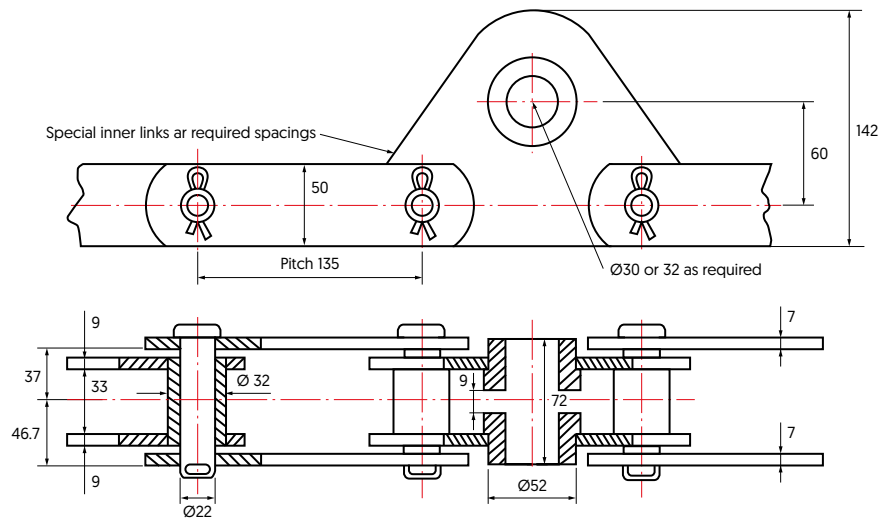

Hydro Trash Catcher.




Washing Area: This chain is used to convey the beet through a washer.

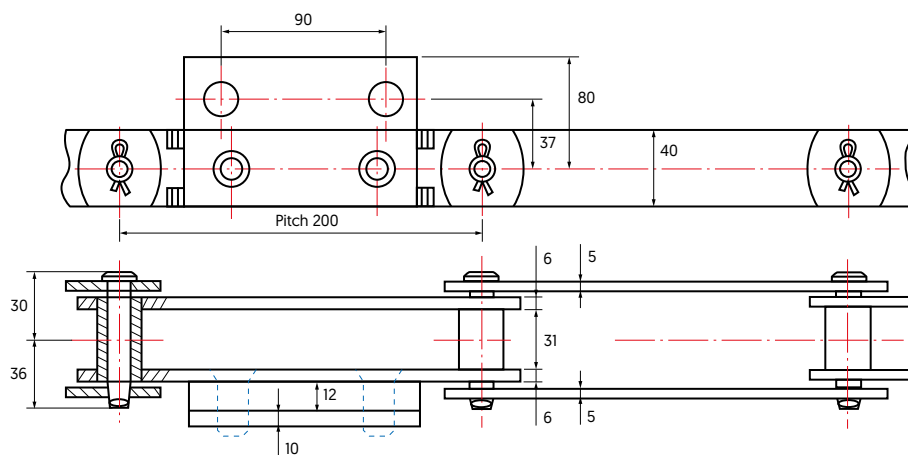

Feed Conveyor.




Diffusion area: This chain carries beet pulp to the drying kilns.

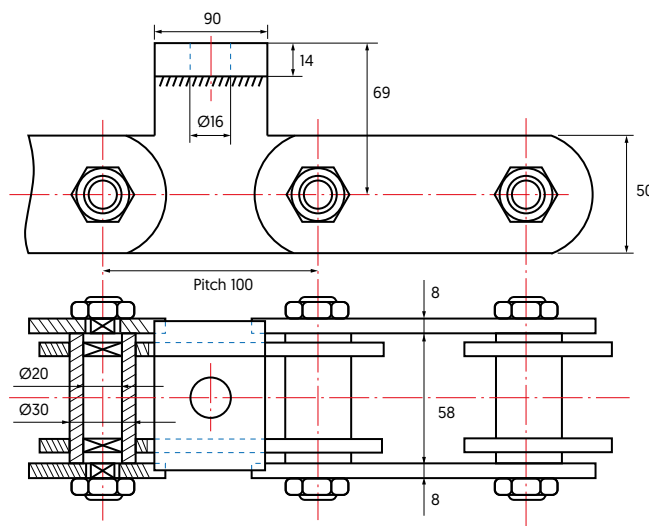

Stone Trap.



Washing Area: The chains operating in double strand are employed to carry away stones removed during the washing of the sugar beet.

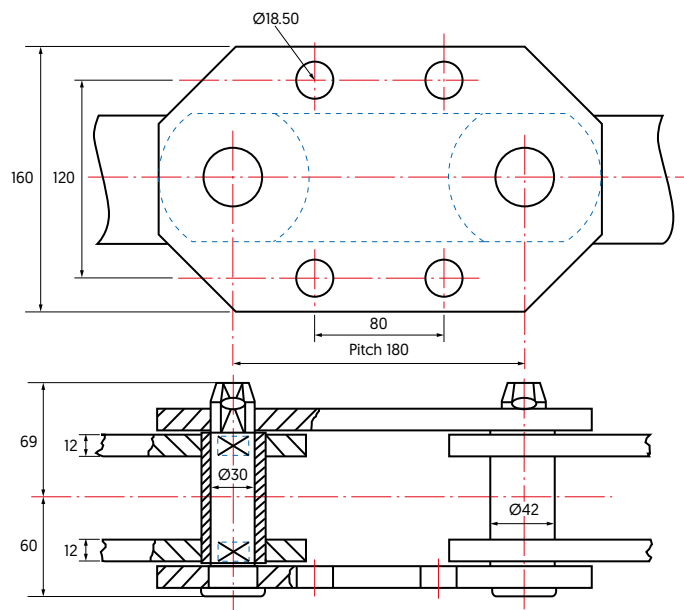



Technical drawing of a mechanical assembly, showing front and side views with dimensions.

Front View (Top):

- Overall width: 60
- Overall height: 70
- Pitch (distance between mounting holes): 200
- Mounting holes are spaced 100 units apart (200 pitch / 2).
- End features include a flange on the left and a hexagonal nut on the right.

Side View (Bottom):

- Overall width: 125
- Overall height: 63
- Mounting holes are spaced 75 units apart (125 width / 1.667).
- Mounting holes are Ø20.5.
- Internal features include a central block with a height of 160 and a base with a height of 92.
- End features include a flange on the left and a hexagonal nut on the right.

Scalding Tub.




Technical drawing of a 1000mm long rail assembly. The top view shows a rail with a pitch of 200mm between two sets of wheels. The rail has a width of 50mm and a height of 55mm. The bottom view shows the rail mounted on a base with a total width of 73.6mm and a height of 36.8mm. The base has a width of 70mm and a height of 36.3mm. The rail is secured with two sets of wheels, each with a diameter of 14.5mm. The rail is also secured with a bolt and nut assembly. The bottom view shows two section views: section 60 x 40 x 4 and section 60 x 40 x 4.



Sugar Beet Diffuser.

Diffuser area: Used on a continuous sugar beet diffuser. Two chains run in parallel connected by perforated steel slats forming a continuous apron.

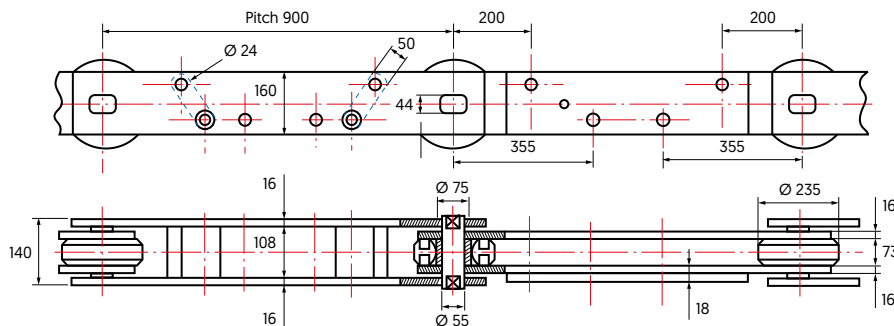

bsi.



Certificate of Registration

QUALITY MANAGEMENT SYSTEM - ISO 9001:2015

This is to certify that:

John King Chains Ltd
New Climax Works
Lancaster Way
Sherburn in Elmet
Leeds
LS25 6NS
United Kingdom

Holds Certificate Number:

FM 77342

and operates a Quality Management System which complies with the requirements of ISO 9001:2015 for the following scope:

The manufacture, procurement and supply of conveying chains, sprockets and ancillary components including engineered steel, cast link, forged link and Acetal chains including related processes of machining, laser profiling, forming and general fabrication.

For and on behalf of BSI:



Andrew Launn, EMEA Systems Certification Director

Original Registration Date: 2003-11-15

Latest Revision Date: 2021-06-23

Effective Date: 2021-07-25

Expiry Date: 2024-07-24

Page: 1 of 1



...making excellence a habit.™

This certificate was issued electronically and remains the property of BSI and is bound by the conditions of contract.
An electronic certificate can be authenticated [online](https://www.bsigroup.com/ClientDirectory).
Printed copies can be validated at www.bsigroup.com/ClientDirectory

Information and Contact: BSI, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP. Tel: +44 345 080 9000
BSI Assurance UK Limited, registered in England under number 7805321 at 389 Chiswick High Road, London W4 4AL, UK.
A Member of the BSI Group of Companies.



FM 77342
ISO 9001



Branches.

John King Chains USA Inc.

Birmingham, USA
Tel. +1 205 593 4279

John King Chains Central Europe Sp. z o.o.

Nakło nad Notecią, Poland
Tel. +48 600 871 077

Cadenas John King Ltda.

Concepción, Chile
Tel. +56 41 2214948

John King Chains (SA) (PTY) Ltd.

Boksburg, South Africa
Tel. +27 11 894 3570
Fax +27 11 894 3501

John King Chains Ltd Southern Office

Dursley, UK
Tel. +44 1453 543284

John King Chains Ltd.

Rosario, Argentina
Tel. +54 9 341 214 92 42

JOHN KING

Address

John King Chains Limited

New Climax Works,
Lancaster Business Park,
Sherburn-in-Elmet, LS25 6NS, UK

Phone & Fax

Phone: +44 1977 681 910
Fax: +44 1977 681 899

Online

Email 1: general@johnkingchains.co.uk
Email 2: sales@johnkingchains.co.uk

Website: www.johnkingchains.com